




Splitter box

ZDO8H050MSS0000-00STAK190MSS

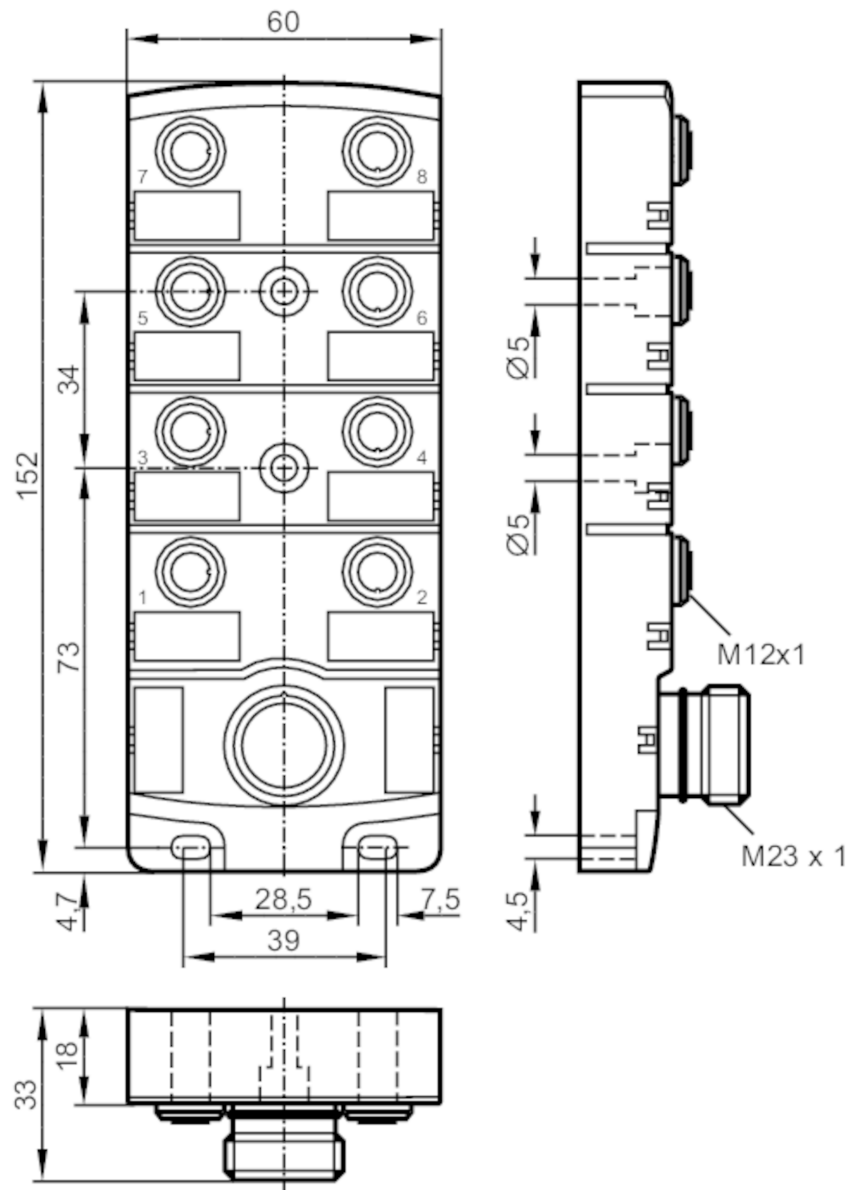

Application

Free from silicone yes

Electrical data

Operating voltage [V] < 30 AC/DC; ("supply class 2" to cULus)

Max. current load per module/slot [A] 4

Max. current load total [A] 10

Operating conditions

Ambient temperature [°C] -25...80

Protection IP 67; ("enclosure type 1" according to cULus)



## Splitter box

ZDO8H050MSS0000-00STAK190MSS


| Mechanical data              |      |               |
|------------------------------|------|---------------|
| Weight                       | [g]  | 286           |
| Dimensions                   | [mm] | 33 x 60 x 152 |
| Materials                    |      | PA            |
| Number of ports splitter box |      | 8             |
| Connector type               |      | M12           |

| Accessories            |  |                                 |
|------------------------|--|---------------------------------|
| Accessories (supplied) |  | Protective caps: 2<br>labels: 8 |

| Remarks       |  |        |
|---------------|--|--------|
| Pack quantity |  | 1 pcs. |

### Electrical connection - Connection

Connector: 1 x M23; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm



### Connection

|   |    |           |   |
|---|----|-----------|---|
| + | 19 | 1 (1...8) | C |
| - | 6  | 3 (1...8) | C |
| ⏏ | 12 | 5 (1...8) | C |
|   | 15 | 4 (1)     | C |
|   | 7  | 2 (1)     | C |
|   | 5  | 4 (2)     | C |
|   | 4  | 2 (2)     | C |
|   | 16 | 4 (3)     | C |
|   | 8  | 2 (3)     | C |
|   | 3  | 4 (4)     | C |
|   | 14 | 2 (4)     | C |
|   | 17 | 4 (5)     | C |
|   | 9  | 2 (5)     | C |
|   | 2  | 4 (6)     | C |
|   | 13 | 2 (6)     | C |
|   | 11 | 4 (7)     | C |
|   | 10 | 2 (7)     | C |
|   | 1  | 4 (8)     | C |
|   | 18 | 2 (8)     | C |

### Electrical connection - slot

Connector: 8 x M12; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

# EBC011



## Splitter box

ZDO8H050MSS0000-00STAK190MSS

