




## Splitter box

ZDO4F035MSJ0000---STGH080MSJ

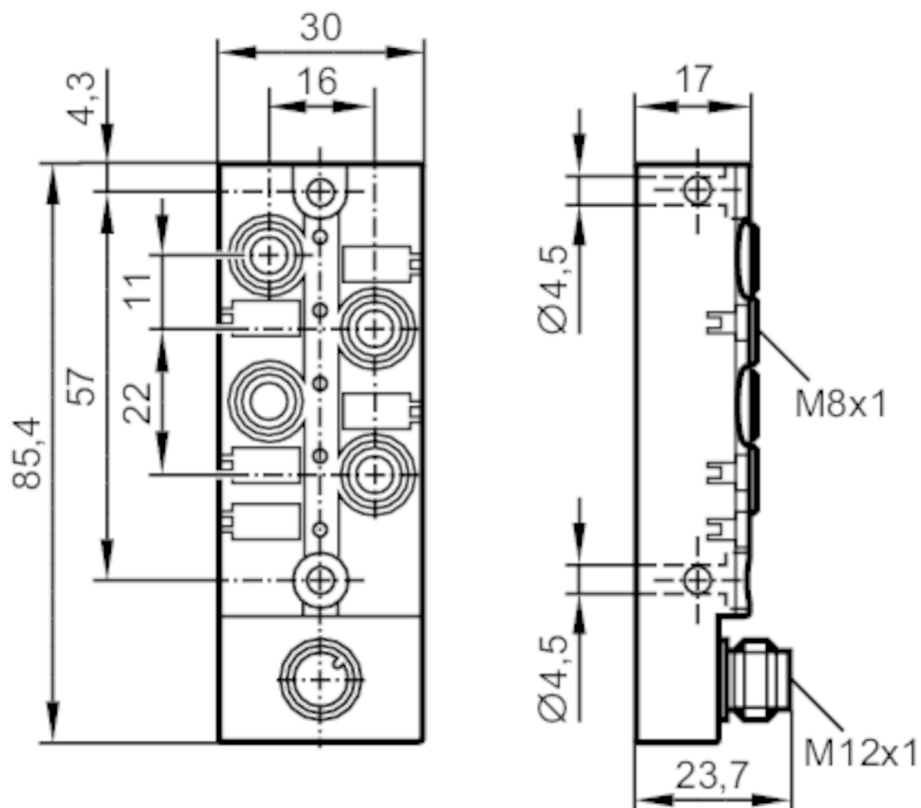

## Electrical data

|                                   |     |                                         |
|-----------------------------------|-----|-----------------------------------------|
| Operating voltage                 | [V] | 10...30 DC; ("supply class 2" to cULus) |
| Protection class                  |     | III                                     |
| Max. current load per module/slot | [A] | 2                                       |
| Max. current load total           | [A] | 2                                       |

## Outputs

|                   |     |
|-------------------|-----|
| Electrical design | NPN |
|-------------------|-----|

## Operating conditions

|                              |      |                                     |
|------------------------------|------|-------------------------------------|
| Ambient temperature          | [°C] | -25...80                            |
| Ambient temperature (moving) | [°C] | -5...60                             |
| Protection                   |      | IP 65; IP 67; IP 68; (1 m / 7 days) |

## Mechanical data

|                              |      |                               |
|------------------------------|------|-------------------------------|
| Weight                       | [g]  | 86.6                          |
| Dimensions                   | [mm] | 23.7 x 30 x 85.4              |
| Materials                    |      | PBT-GF20; brass nickel-plated |
| Number of ports splitter box |      | 4                             |
| Connector type               |      | M8                            |



Splitter box

ZDO4F035MSJ0000---STGH080MSJ

Displays / operating elements

|         |                  |                 |
|---------|------------------|-----------------|
| Display | switching status | 4 x LED, yellow |
|         | operation        | 1 x LED, green  |

Accessories


|                        |                                         |
|------------------------|-----------------------------------------|
| Accessories (optional) | DIN rail adapter:, E73006               |
|                        | Protective caps, for M8 sockets, E73005 |

Remarks


|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

Electrical connection - Connection

Connector: 1 x M12; Moulded body: PBT-GF 20 / brass, nickel-plated; Contacts: gold-plated



Connection

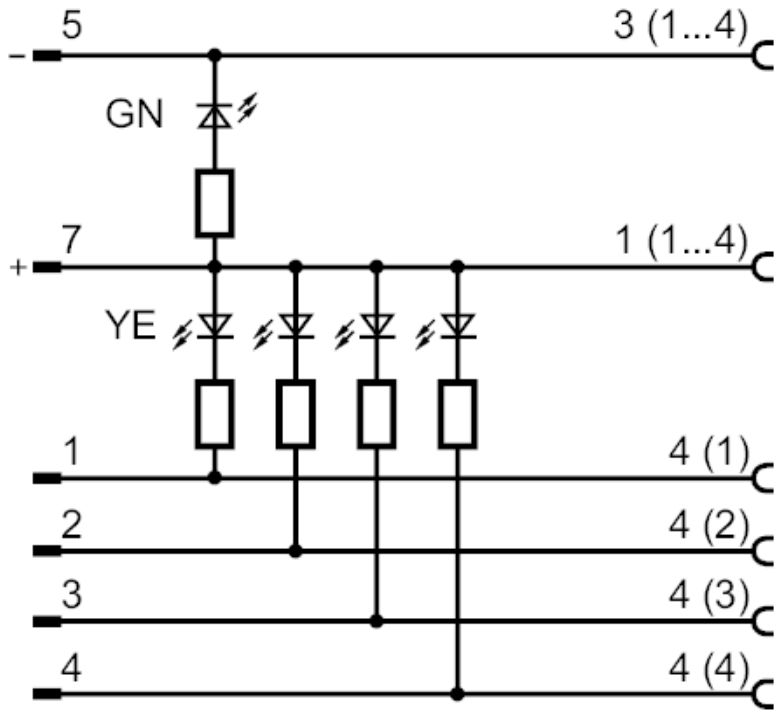

Electrical connection - slot

Connector: 4 x M8; Moulded body: PBT-GF 20 / brass, nickel-plated; Contacts: gold-plated

# EBC060



## Splitter box

ZDO4F035MSJ0000---STGH080MSJ

