


Y-splitter

ZDO2F030MSS0000-00STGH040MSS

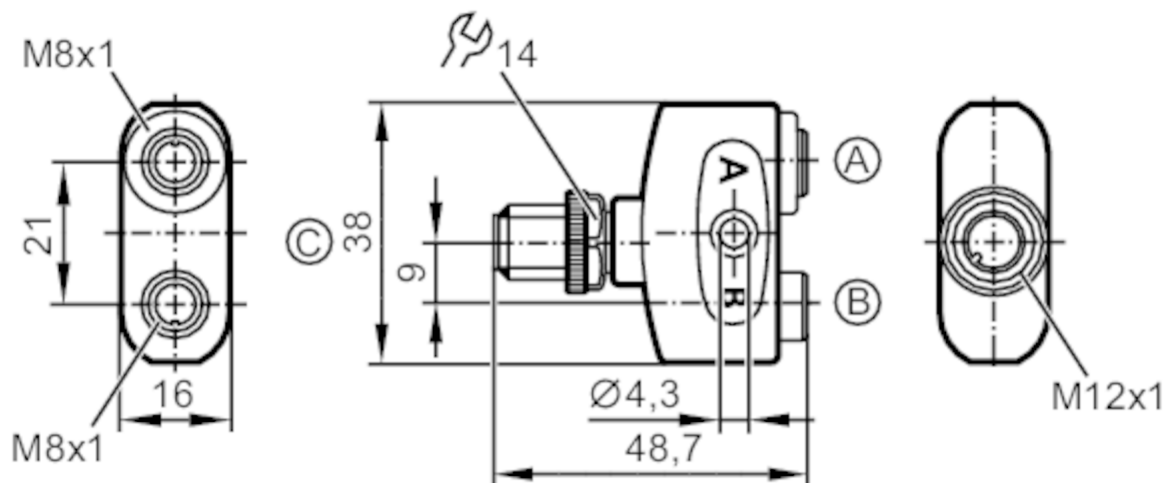

Application

Free from silicone	yes
--------------------	-----

Electrical data

Operating voltage	[V]	< 50 AC / < 60 DC
Protection class		III
Max. current load total	[A]	3

Operating conditions

Ambient temperature	[°C]	-25...90
Protection		IP 65; IP 67; IP 68; IP 69K

Mechanical data


Weight	[g]	30.2
Materials		housing: PA orange; Sealing: FKM
Material nut		brass / brass

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - socket

Connector: 2 x M8; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.3...0.5 Nm





Y-splitter

ZDO2F030MSS0000-00STGH040MSS

Electrical connection - plug

Connector: 1 x M12; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm



Connection

