


Y-splitter

ZDO2H030MSS0000-00STGH040MSS

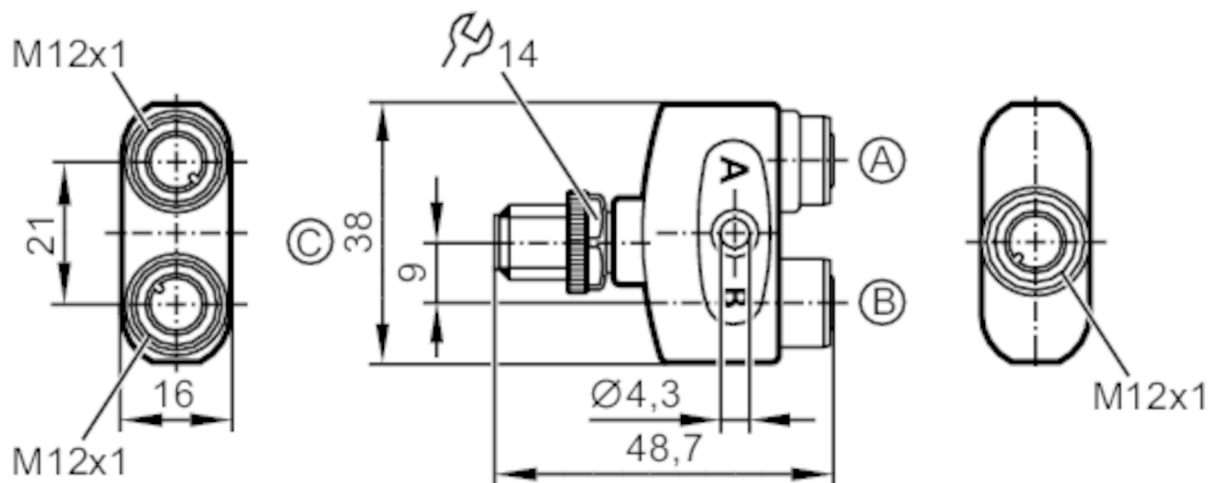

Application

Free from silicone	yes
--------------------	-----

Electrical data

Operating voltage	[V]	< 250 AC / < 300 DC; (cULus: 30 AC / 42 DC)
Protection class		II
Max. current load per module/slot	[A]	4
Max. current load total	[A]	4

Operating conditions

Ambient temperature	[°C]	-25...90
Note on ambient temperature		cULus: ...65 °C
Protection		IP 65; IP 67; IP 68; IP 69K

Mechanical data

Weight	[g]	35.9
Materials		housing: PA orange; Sealing: FKM
Material nut		brass / brass

Remarks

Pack quantity	1 pcs.
---------------	--------


Electrical connection - socket

Connector: 2 x M12; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm




Y-splitter

ZDO2H030MSS0000-00STGH040MSS



Electrical connection - plug

Connector: 1 x M12; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm



Connection

