


EBC126

Splitter box

ZDO6H050MSS0020E15

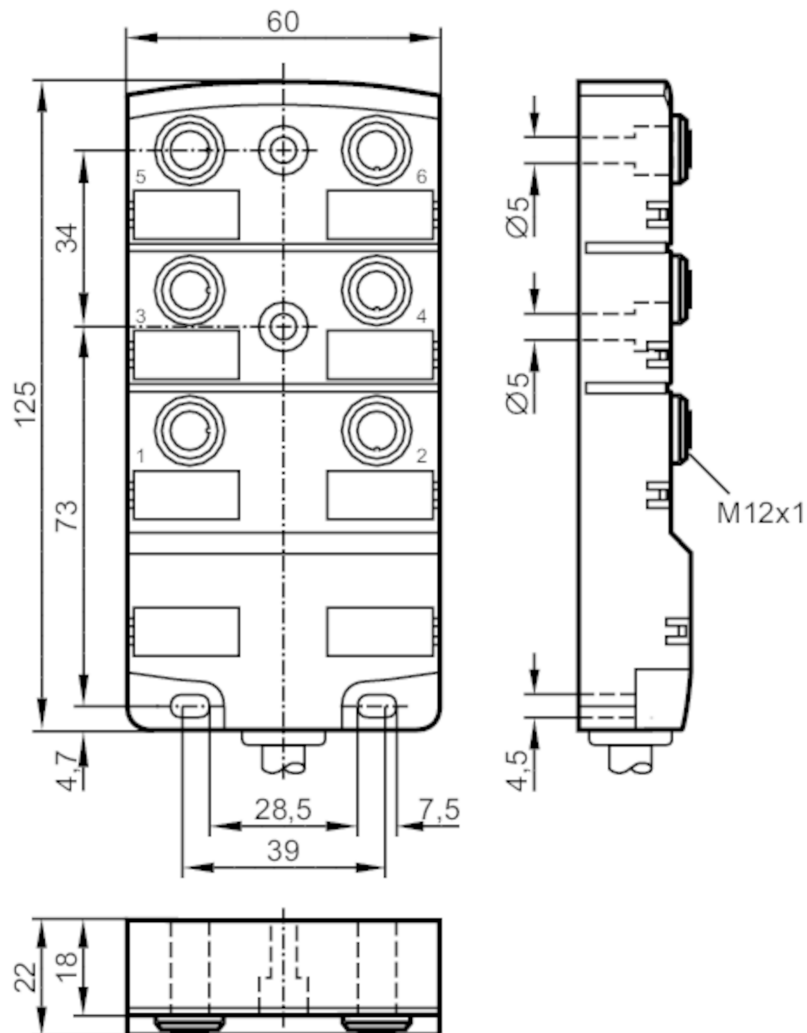

Electrical data

Operating voltage	[V]	< 30 AC/DC; ("supply class 2" to cULus)
Max. current load per module/slot	[A]	4; (per pin: 2; per group: 8)
Max. current load total	[A]	12


Operating conditions

Ambient temperature	[°C]	-25...40
Ambient temperature (moving)	[°C]	-5...60
Protection		IP 67; ("enclosure type 1" according to cULus)



Splitter box

ZDO6H050MSS0020E15


Mechanical data	
Weight [g]	1484.4
Dimensions [mm]	22 x 60 x 125
Materials	PA
Number of ports splitter box	6
Connector type	M12
Accessories	
Accessories (supplied)	labels: 6
Remarks	
Notes	customer-specific
Pack quantity	1 pcs.
Electrical connection	
Cable: 20 m, PVC, black, Ø 6.3 mm; 5 x 0.5 mm ²	
Electrical connection - slot	
Connector: 6 x M12; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm	
	



Splitter box

ZDO6H050MSS0020E15

Connection

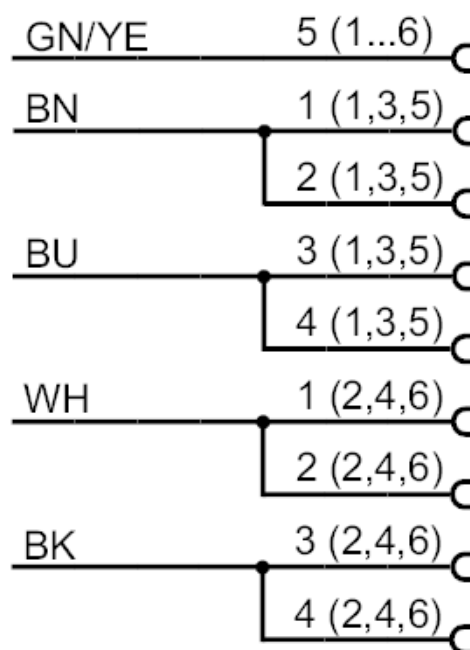

Core colours :

BK =	black
BN =	brown
BU =	blue
GN/YE =	green/yellow
WH =	white