


Splitter box

ZDO8F039MSS0000---STGH120MSS

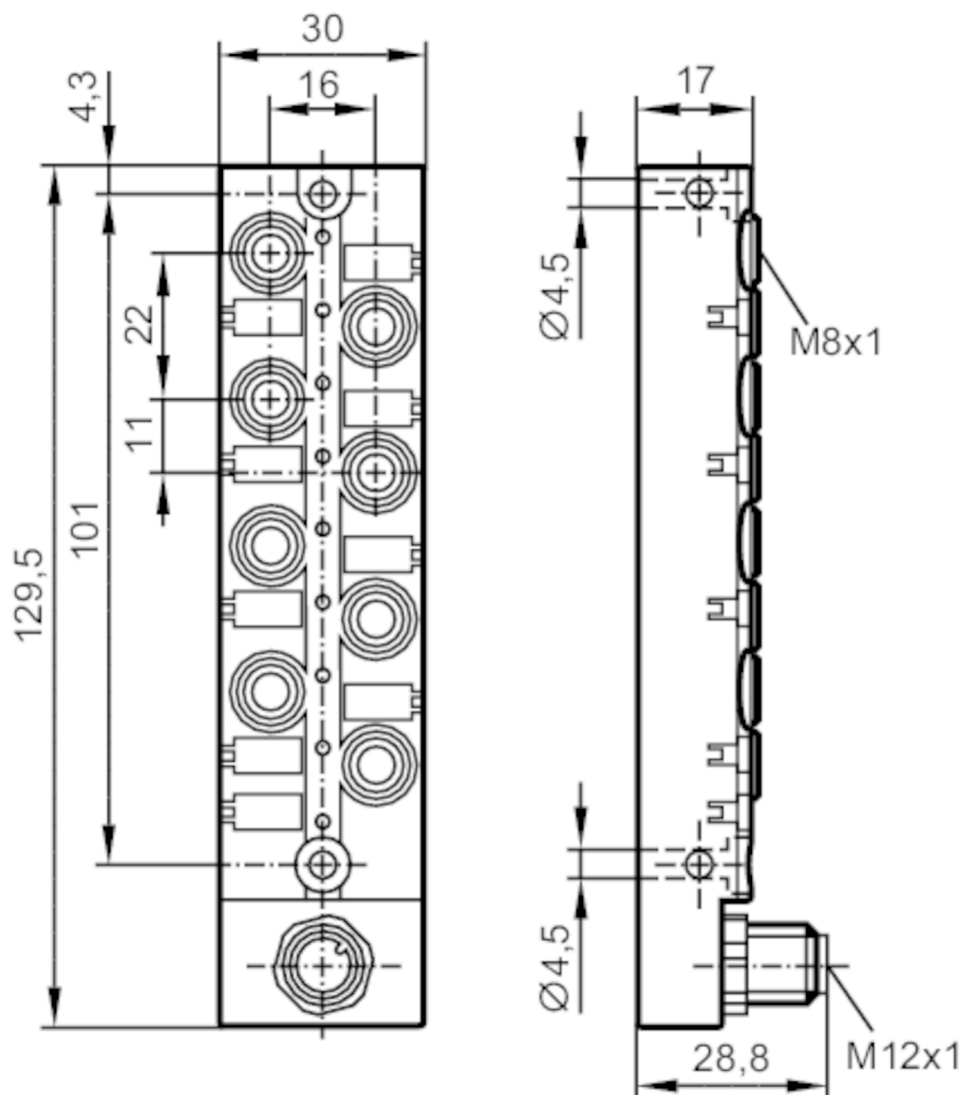

Electrical data

Operating voltage	[V]	15...30 DC; ("supply class 2" to cULus)
Protection class		III
Max. current load per module/slot	[A]	2
Max. current load total	[A]	2

Outputs

Electrical design	PNP
-------------------	-----


Operating conditions

Ambient temperature	[°C]	-25...80
Ambient temperature (moving)	[°C]	-5...60
Protection		IP 67; IP 68; (1 m / 7 days)



Splitter box


ZDO8F039MSS0000---STGH120MSS

Mechanical data		
Weight	[g]	128.6
Materials	PBT-GF20; brass nickel-plated	
Number of ports splitter box	8	
Connector type	M8	
Displays / operating elements		
Display	switching status	8 x LED, yellow
	operation	1 x LED, green
Accessories		
Accessories (optional)	Protective caps, for M8 sockets, E73005	
Remarks		
Pack quantity	1 pcs.	
Electrical connection - Connection		
Connector: 1 x M12; Moulded body: PBT-GF 20 / brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm		
		

Splitter box

ZDO8F039MSS0000---STGH120MSS

Connection

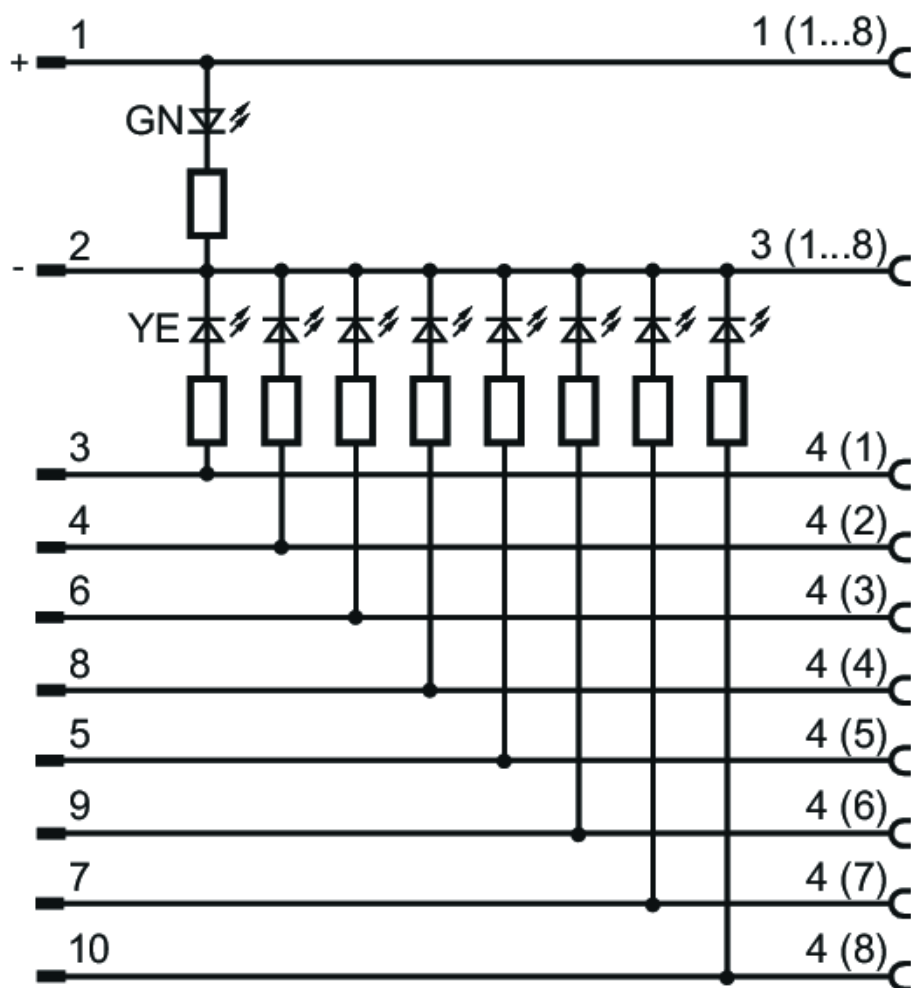

Electrical connection - slot

Connector: 8 x M8; Moulded body: PBT-GF 20 / brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

