




Y-splitter

ZDO2H040VAS0000-00STGH050VAS

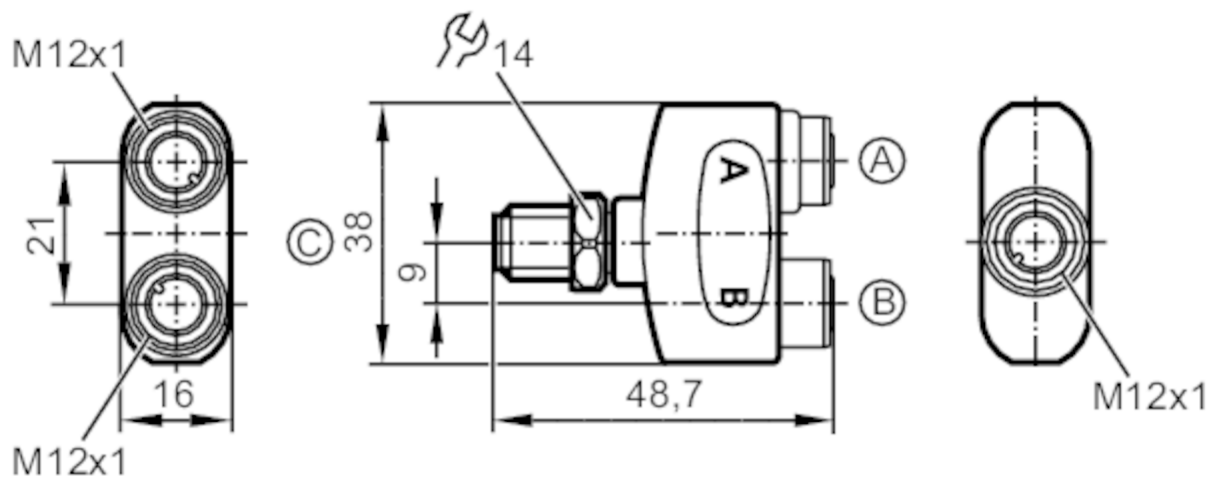

Application

Free from silicone

yes

Electrical data

Operating voltage [V] < 60 AC/DC

Protection class II

Max. current load per module/slot [A] 4

Max. current load total [A] 4

Operating conditions

Ambient temperature [°C] -25...100

Protection IP 65; IP 67; IP 68; IP 69K

Mechanical data

Weight [g] 34.2

Materials PP Halogen-free; Sealing: EPDM

Material nut stainless steel (1.4404 / 316L) / stainless steel (1.4404 / 316L)

Remarks

Pack quantity 1 pcs.


Electrical connection - socket

Connector: 2 x M12; Moulded body: PP, Halogen-free; Locking: stainless steel (1.4404 / 316L); Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm




Y-splitter

ZDO2H040VAS0000-00STGH050VAS




Electrical connection - plug

Connector: 1 x M12; Moulded body: PP, Halogen-free; Locking: stainless steel (1.4404 / 316L); Contacts: gold-plated; Tightening torque: 0.6...1.2 Nm



Connection

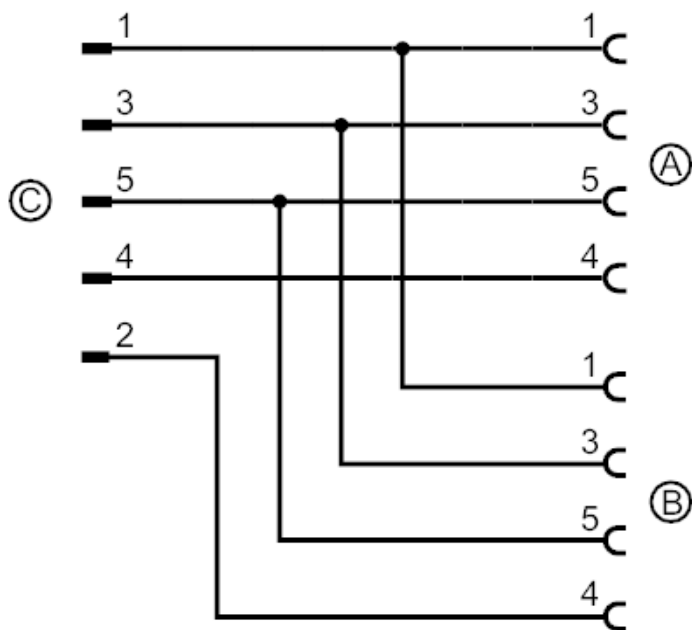

connection to IEC 61076-2-101