


Y-splitter

ZDO2H040VAS0000-00STGH040VAS

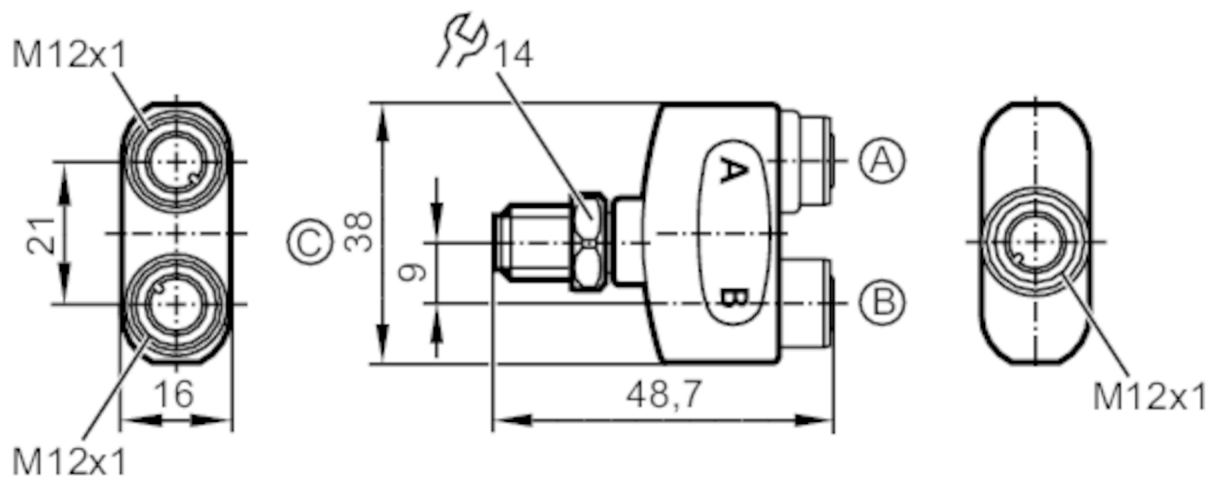

Application

Application	logic AND function
Free from silicone	yes

Electrical data

Operating voltage [V]	< 60 AC/DC
Protection class	II
Max. current load per module/slot [A]	4
Max. current load total [A]	4

Operating conditions

Ambient temperature [°C]	-25...100
Protection	IP 65; IP 67; IP 68; IP 69K

Mechanical data

Weight [g]	34.4
Materials	PP Halogen-free; Sealing: EPDM
Material nut	stainless steel (1.4404 / 316L) / stainless steel (1.4404 / 316L)

Remarks


Pack quantity	1 pcs.
---------------	--------

Electrical connection - socket

Connector: 2 x M12; Moulded body: PP, Halogen-free; Locking: stainless steel (1.4404 / 316L); Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm


Y-splitter

ZDO2H040VAS0000-00STGH040VAS



Electrical connection - plug

Connector: 1 x M12; Moulded body: PP, Halogen-free; Locking: stainless steel (1.4404 / 316L); Contacts: gold-plated; Tightening torque: 0.6...1.2 Nm



Connection

