


EBT005

Splitter box

ZDO8H050VAS000---KA

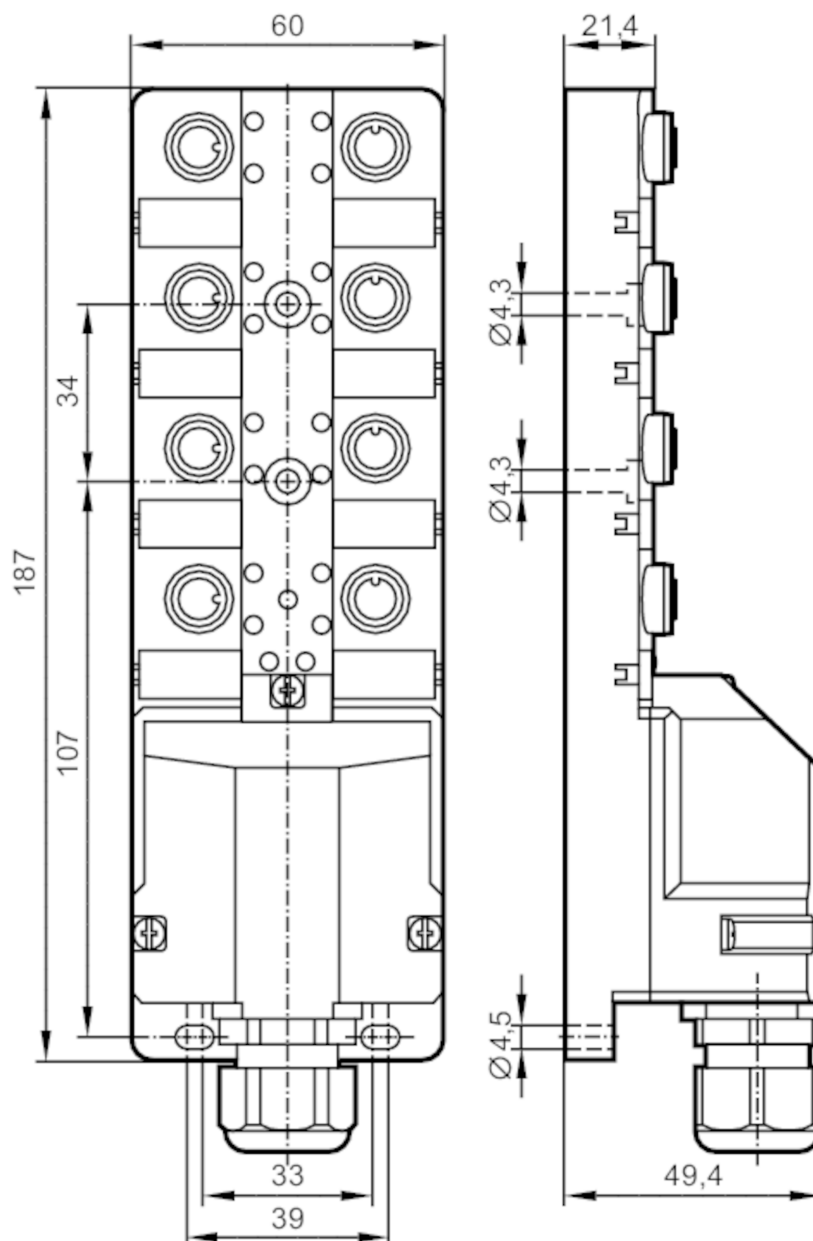

Application

Free from silicone	yes
--------------------	-----

Electrical data

Operating voltage	[V]	10...30 DC
Max. current load per module/slot	[A]	2
Max. current load total	[A]	12

Outputs

Electrical design	PNP
-------------------	-----

EBT005



Splitter box


ZDO8H050VAS000---KA

Operating conditions		
Ambient temperature	[°C]	-25...80
Ambient temperature (moving)	[°C]	-5...60
Protection		IP 67
Mechanical data		
Weight	[g]	368.2
Dimensions	[mm]	49.4 x 60 x 187
Materials		housing: \$PBT-GF30
Number of ports splitter box		8
Connector type		M12
Accessories		
Accessories (supplied)		Protective caps: 2
		labels: 10
		assembly tool for cage clamps
Remarks		
Pack quantity		1 pcs.
Electrical connection - Connection		
terminals: 19 x ; Cable gland: PG11		
Connector: 1 x M12; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm		

Splitter box

ZDO8H050VAS000---KA

Connection

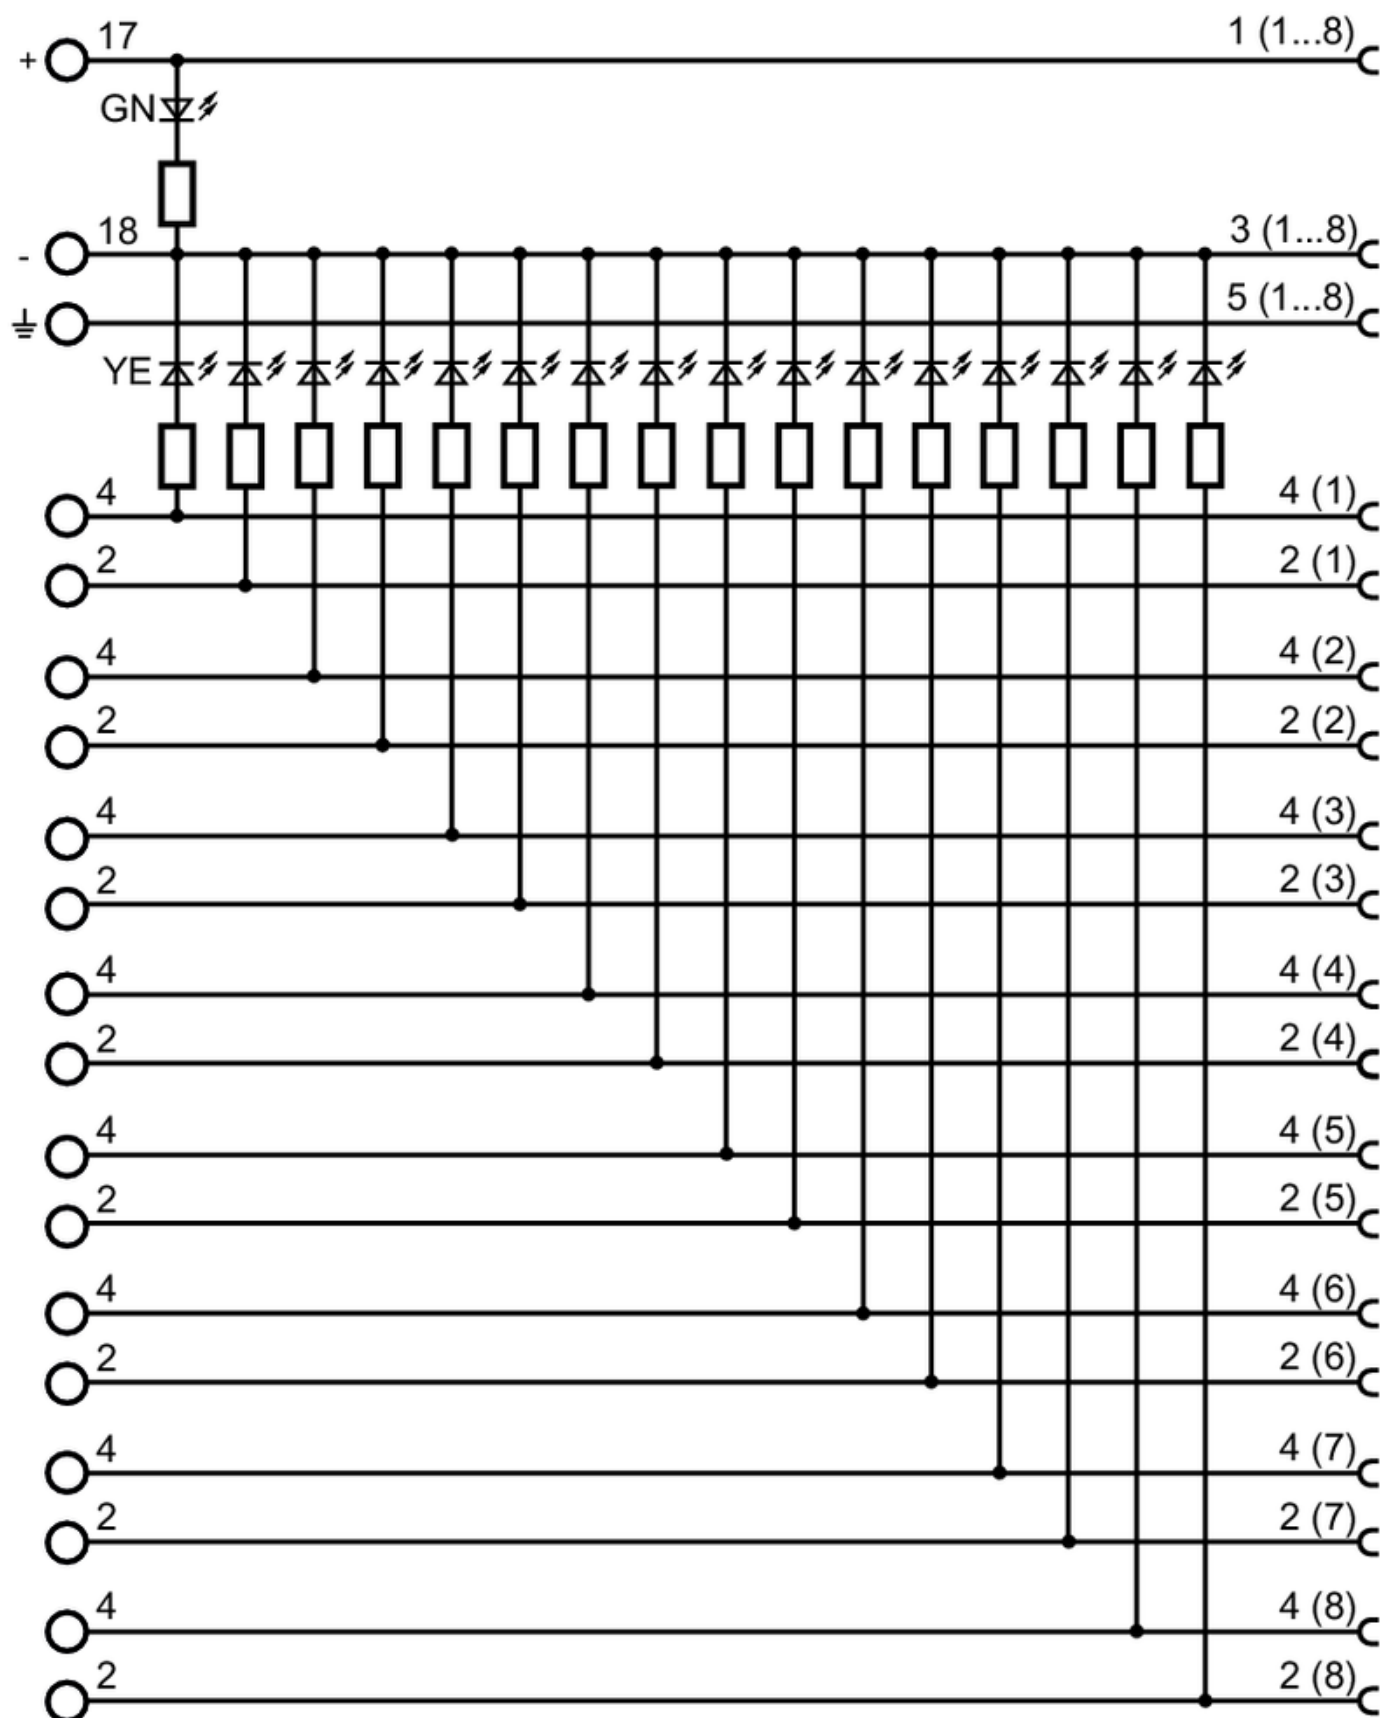

EBT005



Splitter box

ZDO8H050VAS000---KA

Electrical connection - slot

Connector: 8 x M12; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm