


Y-splitter

ZDO2H030VAS0000-00STGH040VAS

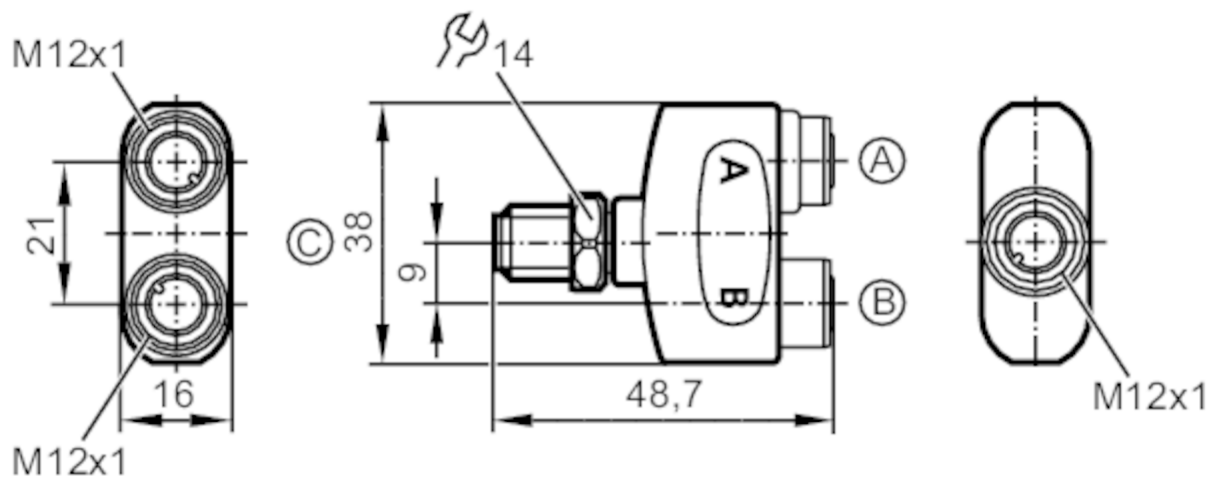

Application

Free from silicone yes

Electrical data

Operating voltage [V] < 250 AC / < 300 DC

Protection class II

Max. current load per module/slot [A] 4

Max. current load total [A] 4

Operating conditions

Ambient temperature [°C] -25...100

Protection IP 65; IP 67; IP 68; IP 69K

Mechanical data

Weight [g] 35

Materials housing: PA orange; Sealing: EPDM

Material nut stainless steel (1.4404 / 316L) / stainless steel (1.4404 / 316L)

Remarks

Pack quantity 1 pcs.


Electrical connection - socket

Connector: 2 x M12; Locking: stainless steel (1.4404 / 316L); Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm



Y-splitter

ZDO2H030VAS0000-00STGH040VAS




Electrical connection - plug

Connector: 1 x M12; Locking: stainless steel (1.4404 / 316L); Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm



Connection

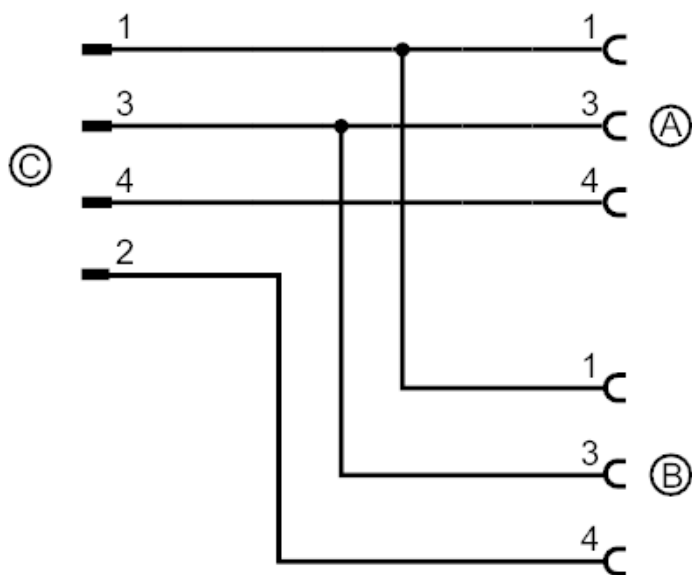

connection to IEC 61076-2-101