

QM/33, QM/34

Magnetically Operated Switches

Reed Switches

- Very neat, compact, cylindrical units
- LED indicator on QM/34 models
- Suitable for use with our ranges of magnet piston cylinders



Ordering information

To order a reed switch with LED and 5 m cable length quote: QM/34/5

To order a reed switch with 2 m cable length quote: QM/33/2

Order mounting brackets separately.

Technical features

Operation:

QM/33 - Normally open

QM/34 - Normally open with LED (yellow)

Switching Voltage:

10 to 240 V a.c./d.c. - QM/33

10 to 30 V d.c. - QM/34

Switching Current (see graph overleaf):

1,5 A maximum - QM/33

1 A maximum - QM/34

Switching Power:

50 W/50 VA maximum QM/33

25 W maximum QM/34

Note: Switch life may be greatly reduced when switching reactive loads, e.g. solenoid, relay, and long cable runs. In such cases the fitment of appropriate voltage/current limiting devices should be considered.

Contact Resistance:

100 mΩ

Response Time:

2 ms - QM/33

0,5 ms - QM/34

Operating Temperature:

-20°C to +80°C

Protection Rating:

IP 66 (DIN 40050)

Shock Resistance:

50 g (during 11 ms)

Vibration Resistance:

35 g (50 to 2000 Hz) - QM/33

10 g (10 to 2000 Hz) - QM/34

Cable Type:

PVC 2 x 0,34 - QM/33

PVC 3 x 0,34 - QM/34

Cable Length:

2, 5 or 10 m

Materials:

Plastic body

Alternative Switches:


See page N 4.3.051.02

Accessories

Plug-in connectors


See page N 4.3.051.02

QM/33



brown
blue






QM/34



+ brown
- blue
black
(Output)



Alternative Switches

Symbol	Switches (without LED)	Symbol	Switches (without LED)	Description
	TQM/33/*			High temperature (+150 °C), silicone cable 2 x 0,34 (5 m length), switching voltage 10 to 30 V a.c. / 10 to 30 V d.c.
			QM/34/P	Plug in connector, cable see below
	QM/33/C/*			Changeover, PVC cable 3 X 0,34 (5 m length), switching voltage 10 to 110 V a.c./175 V d.c., switching current 250 mA, switching power 5 W/ 5 VA, response time 0,7 ms, contact resistance 100 mΩ, vibration resistance 20 g (during 11 ms)
			QM/34/N/*	Negative output, PVC cable 3 x 0,34 (2 or 5 m length)
			QM/34/N/*/PU	Very flexible polyurethane cable 3 x 0,34 (2 m length)
			QM/34/S/*	PVC cable 2 x 0,34 (2, 5 or 10 m length), switching voltage 10 to 240 V a.c./d.c., switching current 500 mA, switching power 50 W/ 50 VA, response time 2 ms
			QM/34/S/*/PU	Very flexible polyurethane cable 2 x 0,5 (2 m length)


* Insert cable length

Weights for Switches and Plug-in Connector Cables






		Plug-in Connector Cables			Plug-in Connector Cables		
Model	Weight (kg)	Model	Outer cover	Weight (kg)	Model	Outer cover	Weight (kg)
QM/33/2	0,053	M/P34614/*	PVC	0,150	M/P34615/*	PVC	0,156
QM/34/2	0,066	M/P34595/*	Polyurethane	0,130	M/P34596/*	Polyurethane	0,136
QM/34/P	0,004						

* Insert 5 m cable length

Basic Dimensions

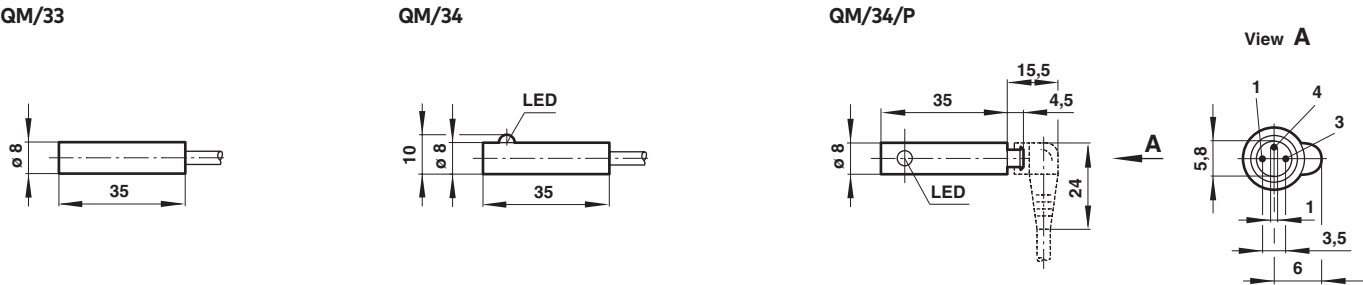

Switching current and switching voltage

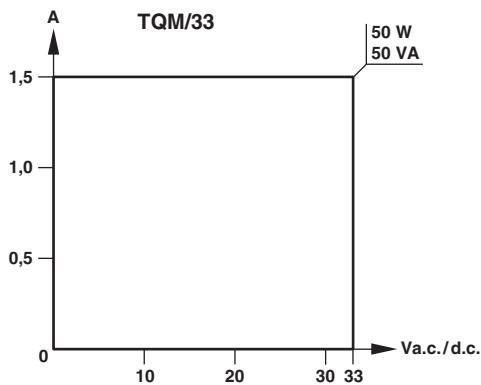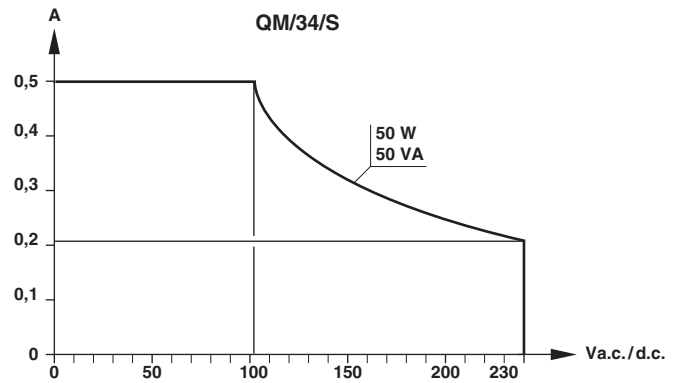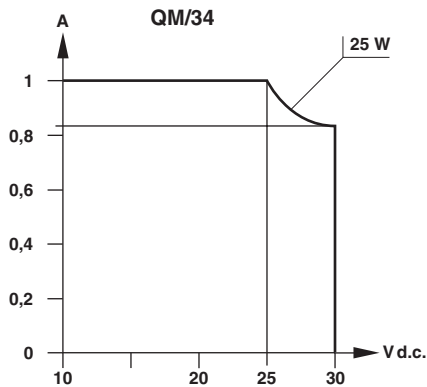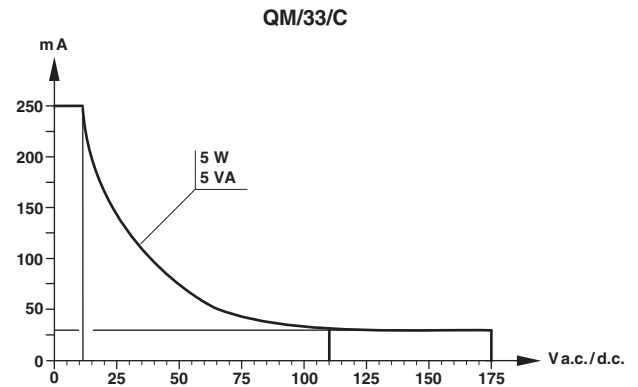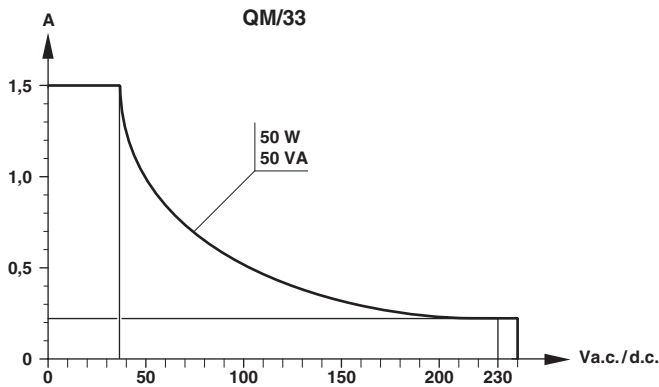

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under »**Technical features/ data**«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult Norgren.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.