


238 series Single shut off quick release couplings

- Normal size: Ø 7,2 mm
- Single handed operation
- High flow, low pressure drop
- European Standard Industrial profile
- Interchangeable with: Rectus 35 & 26 series
- Cejn 320
- JWL 520 & 530



Technical features

Medium:
Compressed air and liquid fluids

Operation:
Single shut off:
The plug designed straight through, coupling shuts off immediately when connection is broken.
The ideal solution for operating compressed air tools.

Operating pressure:
0 ... 35 bar (0 ... 507 psi)

Water flow (kv factor):
1,2

Ambient/Media temperature:
-20°C ... +100°C (-4 ... +212 °F)
Air supply must be dry enough to avoid ice formation at temperatures below +2°C (+35 °F).

Materials:
Coupling:
Body and sleeve: nickel plated brass
Valve: brass
Spring and locking ring/balls: Stainless steel
Seals: NBR
Plug:
Body: nickel plated brass







Option selector

238★★★★★

Style	Substitute
Plug	1
Coupling	2
Shape	Substitute
External thread (ISO G)	1
Internal thread (ISO G)	2
Hose barb	3


Thread size	Substitute
1/8	0018
1/4	0028
3/8	0038
1/2	0048
Tube - inside diameter	Substitute
6	0600
9	0900
13	1300

Couplings and plugs

<p>Coupling – male thread Thread: ISO G</p>  <p>Page 2</p>	<p>Coupling – female thread Thread: ISO G</p>  <p>Page 2</p>	<p>Coupling – hose barb</p>  <p>Page 2</p>	<p>Plug – male thread Thread: ISO G</p>  <p>Page 2</p>	<p>Plug – female thread Thread: ISO G</p>  <p>Page 2</p>	<p>Plug – hose barb</p>  <p>Page 2</p>
---	---	---	--	---	---

Coupling – male thread

Thread: ISO G

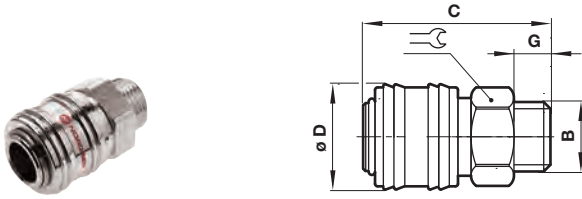


Normal size	B	C	Ø D	G		Model
Ø 7,2	G1/4	39	25	9	22	238210028
Ø 7,2	G3/8	41	25	9	22	238210038
Ø 7,2	G1/2	44	25	12	22	238210048

Coupling – female thread


Thread: ISO G

Dimensions in mm
Projection/First angle

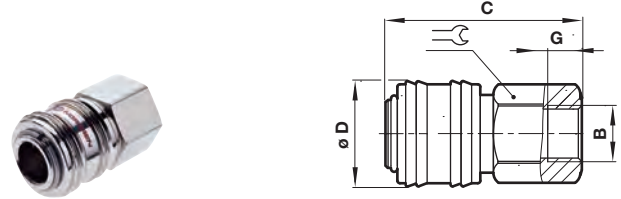


Normal size	B	C	Ø D	G		Typ
Ø 7,2	G1/4	41	25	9	22	238220028
Ø 7,2	G3/8	41	25	9	22	238220038
Ø 7,2	G1/2	44	25	10	24	238220048

Coupling – hose barb

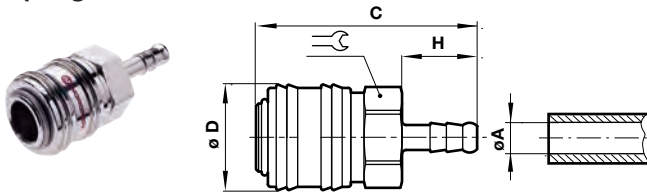

Normal size	Tube Ø A	C	Ø D	H		Model
Ø 7,2	6	58	25	25	21	238230600
Ø 7,2	9	58	25	25	21	238230900
Ø 7,2	13	58	25	25	21	238231300

Plug – hose barb

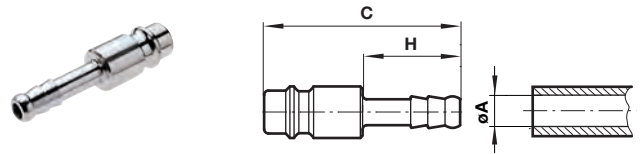

Normal size	Tube Ø A	C	H	Model
Ø 7,2	6	48	25	238130600
Ø 7,2	9	48	25	238130900
Ø 7,2	13	48	25	238131300

Plug – male thread


Thread: metric, ISO G



Normal size	B	C	G		Model
Ø 7,2	G1/8	31	7	14	238110018
Ø 7,2	G1/4	33	9	17	238110028
Ø 7,2	G3/8	33	9	19	238110038
Ø 7,2	G1/2	38	12	24	238110048

Plug – female thread

Thread: ISO G

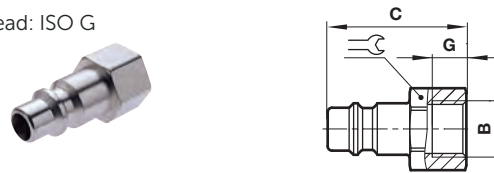

Normal size	B	C	G		Model
Ø 7,2	G1/4	33	10	17	238120028
Ø 7,2	G3/8	33	10	19	238120038
Ø 7,2	G1/2	35	12	24	238120048

Warning

These products are intended for use in industrial compressed air and fluid systems only. Do not use these products where pressures and temperatures can exceed those listed under »**Technical features/data**«. Before using these products with fluids other than those specified, for non-industrial applications, life-support systems, or other applications not within published specifications, consult IMI NORGREN.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes. The system designer is warned to consider the failure modes of all

component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.