


EVF088



Connecting cable with plug

ASTAH040VAS0002P04

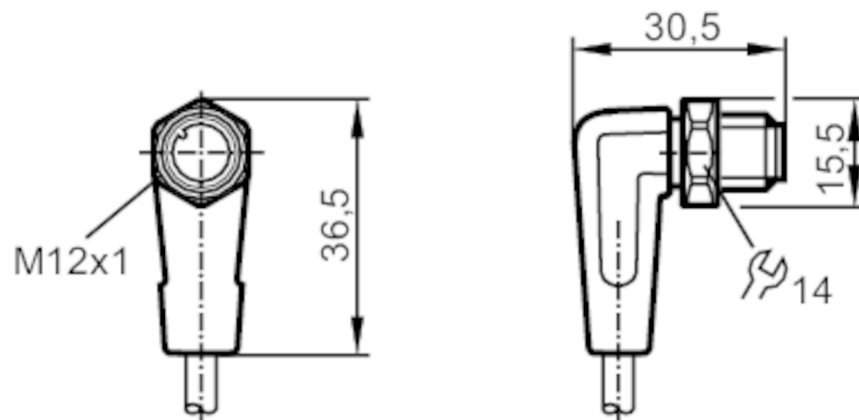

Application

Application	hygienic and wet areas in the food industry
Free from silicone	yes

Electrical data

Operating voltage [V]	< 250 AC / < 300 DC
Protection class	II
Max. current load total [A]	4

Operating conditions

Ambient temperature [°C]	-25...100
Note on ambient temperature	cULus: ...65 °C
Ambient temperature (moving) [°C]	0...100
Note on ambient temperature (moving)	cULus: ...65 °C
Protection	IP 65; IP 67; IP 68; IP 69K

Mechanical data

Weight	[g]	77.8	
Materials		PP Halogen-free	
Material nut		stainless steel (1.4404 / 316L)	
Drag chain suitability		bending radius for flexible use	min. 10 x cable diameter
		travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s²
		bending cycles	> 1 Mio.
		torsional strain	± 180 °/m
Drag chain suitability		yes	

EVF088



Connecting cable with plug

ASTAH040VAS0002P04

Remarks


Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 2 m, MPPE, grey, Ø 4.9 mm; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Electrical connection - plug

Connector: 1 x M12, angled; Moulded body: PP, Halogen-free; Locking: stainless steel (1.4404 / 316L); Contacts: gold-plated; Tightening torque: 0.6...1.2 Nm



Connection

1	BN
2	WH
3	BU
4	BK

	Core colours :
BK =	black
BN =	brown
BU =	blue
WH =	white