


Wirable socket

SDOGH050VASFKPG

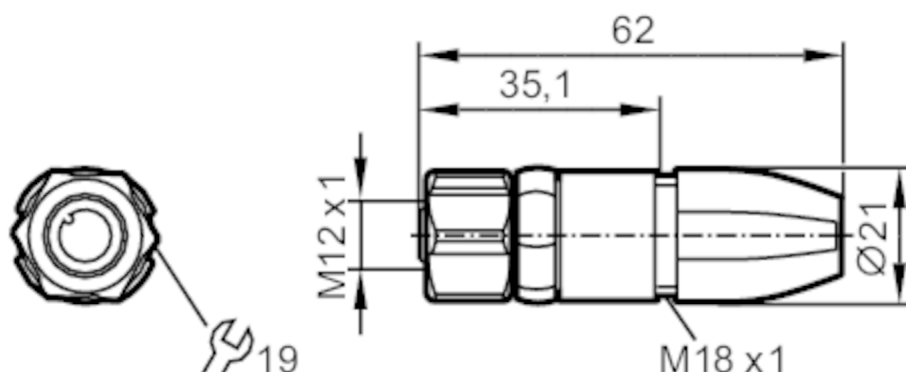

Application

Design	straight
Application	hygienic and wet areas in the food industry
Free from silicone	yes

Electrical data

Operating voltage	[V]	< 60 AC/DC
Protection class		II
Max. current load total	[A]	4; (...40 °C)

Operating conditions

Ambient temperature	[°C]	-25...100
Protection		IP 65; IP 67; IP 68; IP 69K

Mechanical data

Weight	[g]	41.9
Materials		PA 6.6 grey; Sealing EPDM
Material nut		stainless steel (1.4404 / 316L)

Remarks

Pack quantity		1 pcs.
---------------	--	--------

Electrical connection

screw terminals: 0.25...1 mm²; Cable sheath: Ø 3.5...6 mm; AWG 23...17


Electrical connection - socket

Connector: 1 x M12, straight; Moulded body: PA 6.6, grey; Locking: stainless steel (1.4404 / 316L); Sealing: EPDM; Contacts: gold-plated; Tightening torque: 0.6...1.2 Nm; Take into account the maximum value of the counterpart!

EVF569

Wirable socket

SDOGH050VASFKPG



Connection

