


# EVF572



## Wirable plug

SSTA050VASFKPG

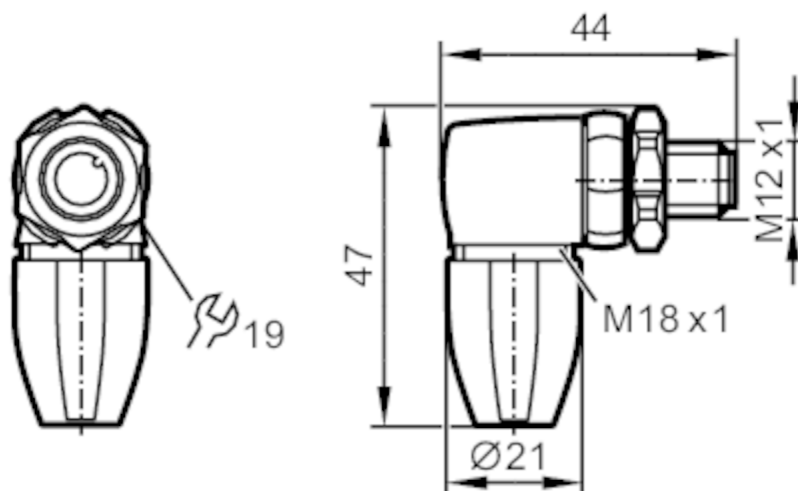

### Application

|                    |                                             |
|--------------------|---------------------------------------------|
| Design             | angled                                      |
| Application        | hygienic and wet areas in the food industry |
| Free from silicone | yes                                         |

### Electrical data

|                         |     |               |
|-------------------------|-----|---------------|
| Operating voltage       | [V] | < 60 AC/DC    |
| Protection class        |     | II            |
| Max. current load total | [A] | 4; (...40 °C) |

### Operating conditions

|                     |      |                             |
|---------------------|------|-----------------------------|
| Ambient temperature | [°C] | -25...100                   |
| Protection          |      | IP 65; IP 67; IP 68; IP 69K |

### Mechanical data

|              |     |                           |
|--------------|-----|---------------------------|
| Weight       | [g] | 33.5                      |
| Materials    |     | PA 6.6 grey; Sealing EPDM |
| Material nut |     | stainless steel           |

### Remarks

|               |  |        |
|---------------|--|--------|
| Pack quantity |  | 1 pcs. |
|---------------|--|--------|

### Electrical connection

screw terminals: 0.25...1 mm<sup>2</sup>; Cable sheath: Ø 3.5...6 mm; AWG 23...17


### Electrical connection - plug

Connector: 1 x M12, angled; Moulded body: PA 6.6, grey; Locking: stainless steel; Sealing: EPDM; Contacts: gold-plated; Tightening torque: 0.6...1.2 Nm; Take into account the maximum value of the counterpart!

# EVF572

## Wirable plug

SSTA050VASFKPG



### Connection

