



Connecting cable with socket

ADOGH040VAS0005E04



| Application                          |      |                                             |
|--------------------------------------|------|---------------------------------------------|
| Application                          |      | hygienic and wet areas in the food industry |
| Free from silicone                   |      | yes                                         |
| Electrical data                      |      |                                             |
| Operating voltage                    | [V]  | < 250 AC / < 300 DC                         |
| Protection class                     |      | II                                          |
| Max. current load total              | [A]  | 4                                           |
| Operating conditions                 |      |                                             |
| Ambient temperature                  | [°C] | -25...100                                   |
| Note on ambient temperature          |      | cULus: ...50 °C                             |
| Ambient temperature (moving)         | [°C] | 5...100                                     |
| Note on ambient temperature (moving) |      | cULus: ...50 °C                             |
| Protection                           |      | IP 65; IP 67; IP 68; IP 69K                 |

# EVT001



## Connecting cable with socket


ADOGH040VAS0005E04

| Mechanical data        |                                    |                                                                                                |
|------------------------|------------------------------------|------------------------------------------------------------------------------------------------|
| Weight                 | [g]                                | 187                                                                                            |
| Dimensions             | [mm]                               | 15.5 x 15.5 x 45                                                                               |
| Materials              | housing: PVC orange; Sealing: EPDM |                                                                                                |
| Material nut           | stainless steel (1.4404 / 316L)    |                                                                                                |
| Drag chain suitability | bending radius for flexible use    | min. 10 x cable diameter                                                                       |
|                        | travel speed                       | max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s <sup>2</sup> |
|                        | bending cycles                     | > 1 Mio.                                                                                       |
|                        | torsional strain                   | ± 180 °/m                                                                                      |
| Drag chain suitability | yes                                |                                                                                                |


| Remarks       |        |
|---------------|--------|
| Pack quantity | 1 pcs. |

| Electrical connection                                                        |
|------------------------------------------------------------------------------|
| Cable: 5 m, PVC, orange, Ø 4.9 mm; 4 x 0.34 mm <sup>2</sup> (42 x Ø 0.1 mm ) |

| Electrical connection - socket                                                                                                 |
|--------------------------------------------------------------------------------------------------------------------------------|
| Connector: 1 x M12, straight; Locking: stainless steel (1.4404 / 316L); Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm |



## Connection

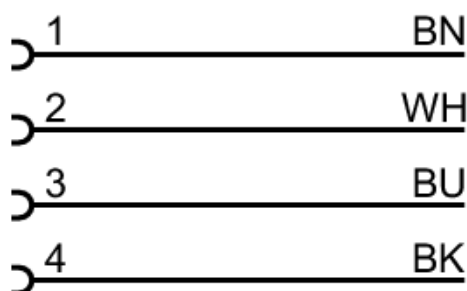

Core colours :

|      |       |
|------|-------|
| BK = | black |
| BN = | brown |
| BU = | blue  |
| WH = | white |