


Connecting cable with socket

ADOAH043SCS0002T04

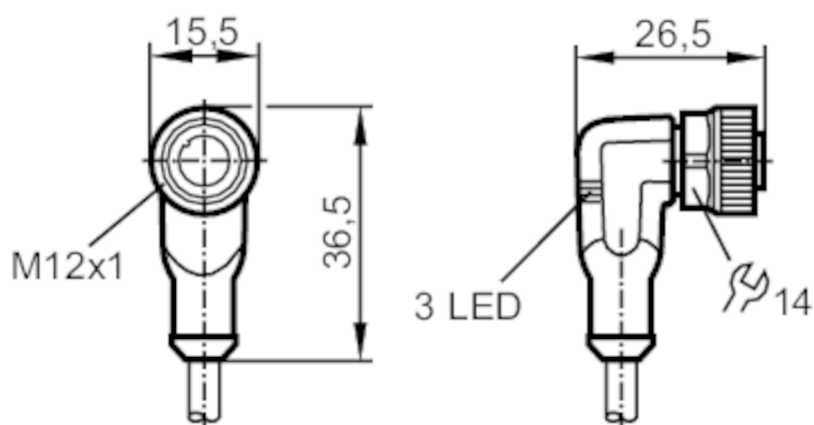

Application

Application	welding applications
Free from silicone	yes

Electrical data

Operating voltage [V]	10...36 DC
Protection class	II
Max. current load total [A]	4

Outputs

Electrical design	PNP
-------------------	-----


Operating conditions

Ambient temperature [°C]	-25...90
Note on ambient temperature	cULus: ...75 °C
Ambient temperature (moving) [°C]	-25...90
Note on ambient temperature (moving)	cULus: ...75 °C
Protection	IP 65; IP 67; IP 68; IP 69K



Connecting cable with socket

ADOAH043SCS0002T04

Mechanical data		
Weight	[g]	88.2
Dimensions	[mm]	26.5 x 15.5 x 36.5
Materials	housing: TPU black transparent; Sealing: FKM	
Material nut	brass	
Drag chain suitability	bending radius for flexible use	min. 10 x cable diameter
	travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s²
	bending cycles	> 2 Mio.
	torsional strain	± 180 °/m
Drag chain suitability	yes	
Displays / operating elements		
Display	switching status	2 x LED, yellow
	operation	1 x LED, green
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Cable: 2 m, PUR, Halogen-free, orange, Ø 4.9 mm; not irradiated (can be recycled); 4 x 0.34 mm² (42 x Ø 0.1 mm)		
Cable: 2 m, PUR, Halogen-free, orange, Ø 4.9 mm; resistant to welding sparks; 4 x 0.34 mm² (42 x Ø 0.1 mm)		
Electrical connection - socket		
Connector: 1 x M12, angled; Locking: brass, anti-spatter; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm		
		


EVW131



Connecting cable with socket

ADOAH043SCS0002T04

Connection

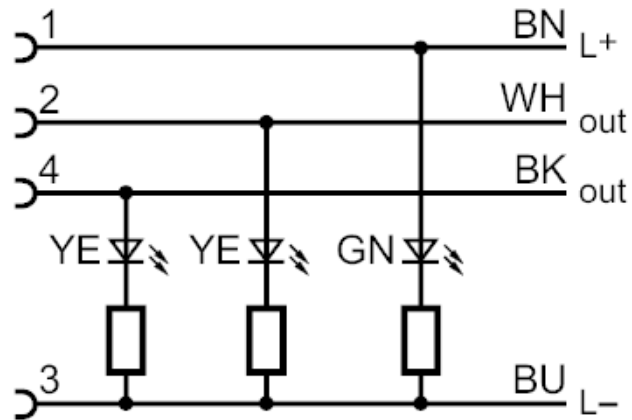

Core colours :

BK =	black
BN =	brown
BU =	blue
WH =	white