


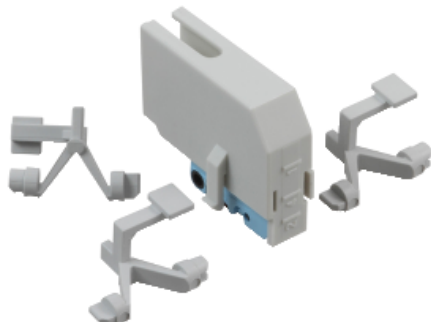

## Main

|                                                          |                                                                                                                                     |
|----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Range of product                                         | TeSys                                                                                                                               |
| Device short name                                        | GS2AF                                                                                                                               |
| Product or component type                                | Auxiliary contact                                                                                                                   |
| Contact application                                      | Blown fuse signalling                                                                                                               |
| Contacts type and composition                            | 1 C/O                                                                                                                               |
| Contact operation                                        | Instantaneous                                                                                                                       |
| [I <sub>th</sub> ] conventional free air thermal current | 16 A (at 40 °C)                                                                                                                     |
| [I <sub>e</sub> ] rated operational current              | 12 A at 24 V DC-13<br>2 A at 48 V DC-13<br>3 A at 400 V AC-15<br>4 A at 230 V AC-15<br>0.4 A at 220 V DC-13<br>0.6 A at 110 V DC-13 |

## Complementary

|                       |                                   |
|-----------------------|-----------------------------------|
| Range compatibility   | TeSys GS fuse-switch disconnecter |
| Mechanical durability | 30000 cycles                      |
| Electrical durability | 30000 cycles AC-15                |
| Product compatibility | GS                                |
| Poles description     | 3P                                |
| Switch rated current  | 630 A                             |
| Fuse type             | DIN<br>NFC                        |
| Fuse size             | 3                                 |
| Product weight        | 0.46 kg                           |

## Offer Sustainability

|                        |                                                  |
|------------------------|--------------------------------------------------|
| REACH free of SVHC     | Yes                                              |
| EU RoHS Directive      | Compliant<br><a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free | Yes                                              |
| Mercury free           | Yes                                              |

|                            |                                        |
|----------------------------|----------------------------------------|
| RoHS exemption information | <a href="#">Yes</a>                    |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a> |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|