



Main

Range of product	Magelis Modular iPC
Accessory / separate part type	Adaptor
Accessory / separate part category	Adaptation accessory
Product compatibility	Magelis iPC industrial PCs

Complementary

Accessory / separate part destination	Magelis Modular Display HMIDM on rear
[Us] rated supply voltage	24 V DC 100...240 V AC external adaptor
Input voltage	24 V DC 100...240 V AC external adaptor
Inrush current	5.3 A
Integrated connection type	Display port input video signal 1 USB (V2.0) port type B output touch screen signal
Power consumption in W	15.77 W (HMIDM6422) 13.97 W (HMIDM6522) 12.42 W (HMIDM7421) 14.68 W (HMIDM7521) 17.57 W (HMIDM9521) 23.33 W (HMIDMA521) 22.05 W (HMIDM6422 receiver module) 20.02 W (HMIDM6522 receiver module) 19.05 W (HMIDM7421 receiver module) 21.29 W (HMIDM7521 receiver module) 24 W (HMIDM9521 receiver module) 29.12 W (HMIDMA521 receiver module) 24.51 W (HMIDM6422 transmitter and receiver module) 22.53 W (HMIDM6522 transmitter and receiver module) 21.25 W (HMIDM7421 transmitter and receiver module) 23.76 W (HMIDM7521 transmitter and receiver module) 26.53 W (HMIDM9521 transmitter and receiver module) 31.48 W (HMIDMA521 transmitter and receiver module)
Product weight	0 kg 1.8 kg 2.4 kg

Environment

Pollution degree	2
------------------	---

Ambient air temperature for operation	0...55 °C
Ambient air temperature for storage	-30...70 °C
Operating altitude	2000 m
Product certifications	IEC Ex hazardous locations 3GD zone 2/22 RCM CULus HazLoc Class I Division 2 ANSI/ISA 12-12-01 CCC CULus CSA 22-2 No 142 EAC ATEX CE CULus CULus HazLoc Class I Division 2 CSA 22-2 No 213
Relative humidity	10...95 % non-condensing


Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty


Warranty	18 months
----------	-----------

External Dimensions

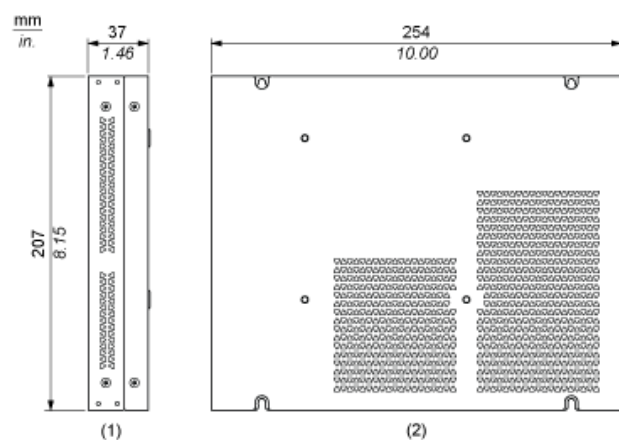

- (1) Side view
(2) Rear view

Spacing Requirements

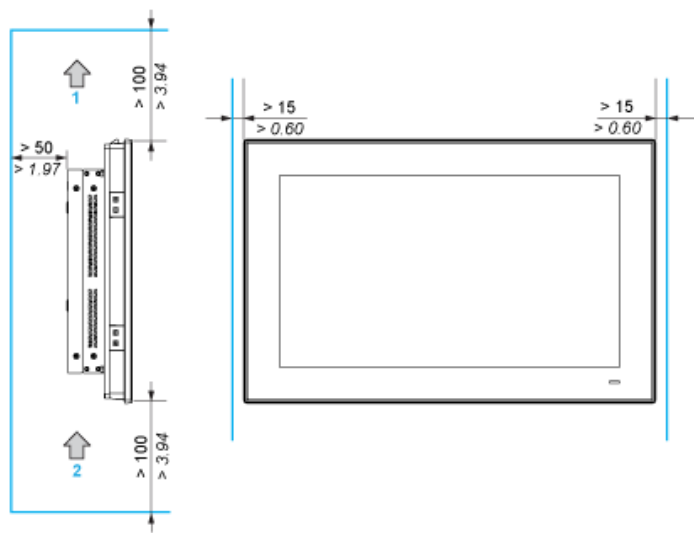

- (1) Air out
- (2) Air in

Mounting Orientation

