


ID5028



Inductive sensor

ID-3050-ANKG

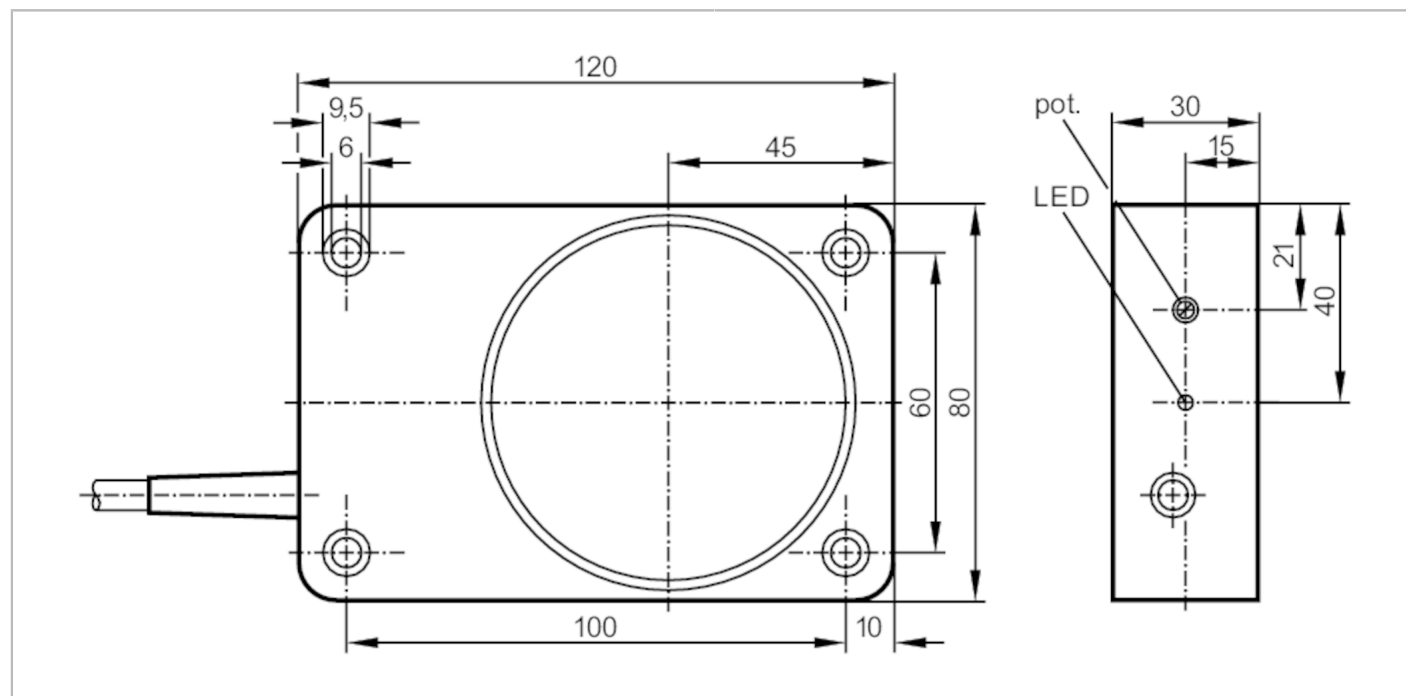

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	15; (24 V)
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	NPN
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	250
Switching frequency DC [Hz]	8
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes

Detection zone

Sensing range [mm]	50
Sensing range adjustable	yes
Factory setting sensing range [mm]	50
Real sensing range S_r [mm]	$50 \pm 10 \%$
Operating distance [mm]	0...40.5



Inductive sensor

ID-3050-ANKG

Accuracy / deviations		
Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2	
Hysteresis	[% of Sr]	1...15
Switch point drift	[% of Sr]	-10...10
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection	IP 65	
Tests / approvals		
EMC	EN 60947-5-2	class B
	EN 55011	
MTTF	[years]	1112
Mechanical data		
Weight	[g]	589.8
Housing	rectangular	
Mounting	non-flush mountable	
Dimensions	[mm]	120 x 80 x 30
Materials	PPE modified	
Displays / operating elements		
Display	switching status	1 x LED, yellow
Accessories		
Accessories (supplied)	screwdriver: 1	
Remarks		
Pack quantity	1 pcs.	

ID5028




Inductive sensor

ID-3050-ANKG

Electrical connection

Cable: 2 m, PVC; 3 x 0.5 mm²

Connection

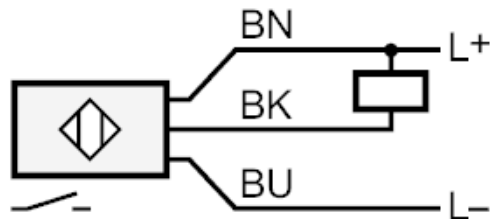

Core colours :

BN =	brown
BU =	blue
BK =	black