

Inductive sensor

IEB3001-BPKG/PH



Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	10; (24 V)
Protection class		III
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	750
Notes on switching frequency		1000 nb
Short-circuit protection		yes
Overload protection		yes

Detection zone

Sensing range	[mm]	1
Real sensing range S_r	[mm]	$1 \pm 10 \%$
Operating distance	[mm]	0...0.8

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of S_r]	3...15
Switch point drift	[% of S_r]	-10...10

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

Tests / approvals

MTTF	[years]	5542
------	---------	------


IE5199



Inductive sensor

IEB3001-BPKG/PH

Mechanical data		
Weight	[g]	127
Housing		threaded type
Mounting		flush mountable
Dimensions	[mm]	M8 x 1 / L = 35
Thread designation		M8 x 1
Materials		brass nickel-plated; PBT
Displays / operating elements		
Display	switching status	1 x LED, yellow
Accessories		
Accessories (supplied)		lock nuts: 2
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 2 m, PUR; highly flexible; 3 x 0.14 mm ²		
Connection		

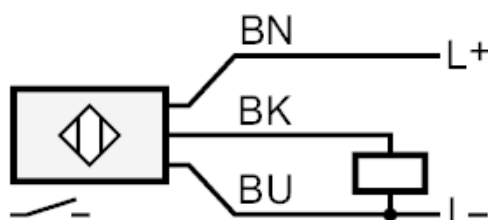

Core colours :

BK = black
BN = brown
BU = blue