


IE5304



Inductive sensor

IEK3002BBPKG/V2A/US-104-DPS

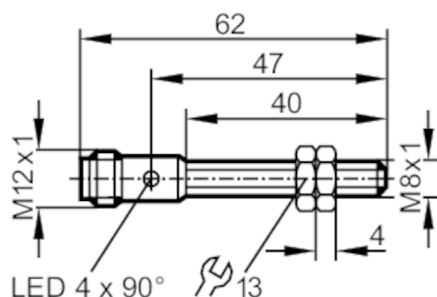

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	15; (24 V)
Protection class		III
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Short-time current rating of switching output	[mA]	200
Switching frequency DC	[Hz]	800
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Sensing range	[mm]	2
Operating distance	[mm]	0...1.55

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.1
Hysteresis	[% of Sr]	1...10
Switch point drift	[% of Sr]	-10...10

Operating conditions

Ambient temperature	[°C]	-20...70
Protection		IP 67

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	3491

IE5304



Inductive sensor

IEK3002BBPKG/V2A/US-104-DPS

Mechanical data

Weight	[g]	23.4
Housing		threaded type
Mounting		flush mountable
Dimensions	[mm]	M8 x 1 / L = 62
Thread designation		M8 x 1
Materials		stainless steel (1.4305 / 303); LCP

Displays / operating elements

Display	switching status	4 x 90° LED, yellow
---------	------------------	---------------------

Accessories

Accessories (supplied)	lock nuts: 2
------------------------	--------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Connector: 1 x M12



Connection

