




Inductive sensor

IEK3004-BPKG/US-104-DPS/OELVER

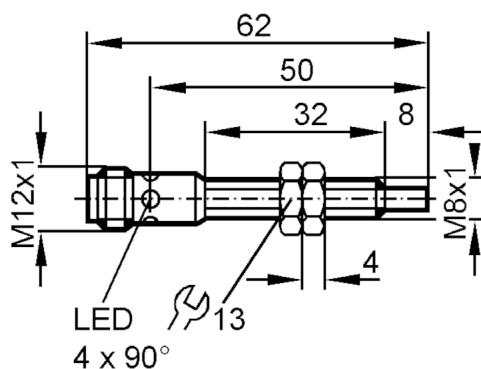

Electrical data

Operating voltage	[V]	10...36 DC; ("supply class 2" to cULus)
Current consumption	[mA]	15; (24 V)
Protection class		III
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	300
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Sensing range	[mm]	4
Real sensing range S_r	[mm]	$4 \pm 10 \%$
Operating distance	[mm]	0...3.25

IE5331



Inductive sensor

IEK3004-BPKG/US-104-DPS/OELVER

Accuracy / deviations		
Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3	
Hysteresis	[% of Sr]	1...10
Switch point drift	[% of Sr]	-10...10
Operating conditions		
Ambient temperature	[°C]	0...70
Protection	IP 67	
Tests / approvals		
EMC	EN 60947-5-2	
MTTF	[years]	3491
UL approval	Ta	-25...70 °C
	Enclosure type	Type 1
	voltage supply	Class 2
	File number UL	E174191
Mechanical data		
Weight	[g]	24.6
Housing	threaded type	
Mounting	non-flush mountable	
Dimensions	[mm]	M8 x 1
Thread designation	M8 x 1	
Materials	brass white bronze coated; LCP	
Displays / operating elements		
Display	switching status	4 x 90° LED, yellow
Accessories		
Accessories (supplied)	lock nuts: 2	
Remarks		
Pack quantity	1 pcs.	
Electrical connection - plug		
Connector: 1 x M12		
		

IE5331



Inductive sensor

IEK3004-BPKG/US-104-DPS/OELVER

Connection

