


IE5369



Inductive sensor

IEB3004-BPKG/V4A/2M



Electrical data

Operating voltage	[V]	10...30 DC; ("supply class 2" to cULus)
Current consumption	[mA]	< 15
Protection class		III
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	500
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Sensing range	[mm]	4
Real sensing range Sr	[mm]	4 ± 10 %
Operating distance	[mm]	0...3.25

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of Sr]	1...15
Switch point drift	[% of Sr]	-10...10

Operating conditions

Ambient temperature	[°C]	0...60
Protection		IP 67

IE5369



Inductive sensor

IEB3004-BPKG/V4A/2M

Tests / approvals

EMC		EN 60947-5-2	
MTTF	[years]		3408
UL approval		Ta	0...60 °C
		Enclosure type	Type 1
		voltage supply	Class 2
		File number UL	E174191

Mechanical data

Weight	[g]	46.2
Housing		threaded type
Mounting		non-flush mountable
Dimensions	[mm]	M8 x 1 / L = 27
Thread designation		M8 x 1
Materials		stainless steel; sensing face: LCP

Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories

Accessories (supplied)	lock nuts: 2
------------------------	--------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 2 m, PUR; 3 x 0.14 mm²

Connection

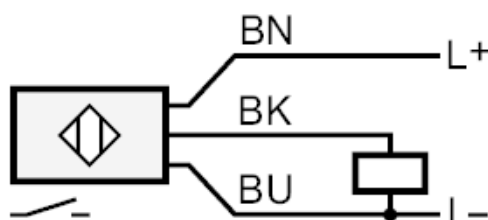

Core colours :

BK =	black
BN =	brown
BU =	blue