


IF6023



Inductive sensor

IFG3007-BPKG/5M

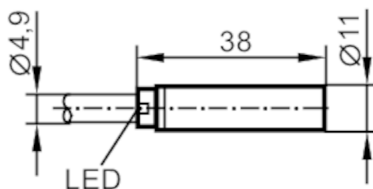

Electrical data

Operating voltage	[V]	10...36 DC; ("supply class 2" to cULus)
Current consumption	[mA]	< 15
Protection class		III
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	400
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Sensing range	[mm]	7
Real sensing range S_r	[mm]	$7 \pm 10\%$
Operating distance	[mm]	0...5.7

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of S_r]	1...15
Switch point drift	[% of S_r]	-10...10

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

Tests / approvals

EMC		EN 60947-5-2	
MTTF	[years]	2744	
UL approval		Ta	-25...80 °C
		Enclosure type	Type 1
		voltage supply	Class 2
		File number UL	E174191

IF6023



Inductive sensor

IFG3007-BPKG/5M


Mechanical data		
Weight	[g]	207.8
Housing		cylindrical
Mounting		non-flush mountable
Dimensions	[mm]	Ø 11 / L = 38
Materials		PBT

Displays / operating elements		
Display	switching status	1 x LED, yellow

Remarks	
Pack quantity	1 pcs.

Electrical connection	
Cable: 5 m, PVC; 3 x 0.34 mm²	

Connection

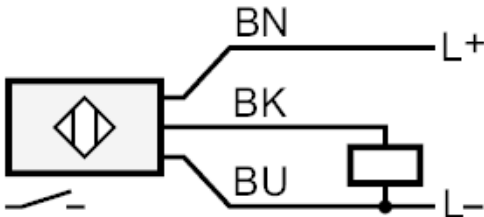

	Core colours :
BK =	black
BN =	brown
BU =	blue