




Inductive sensor

IG-3008-APKG/20M

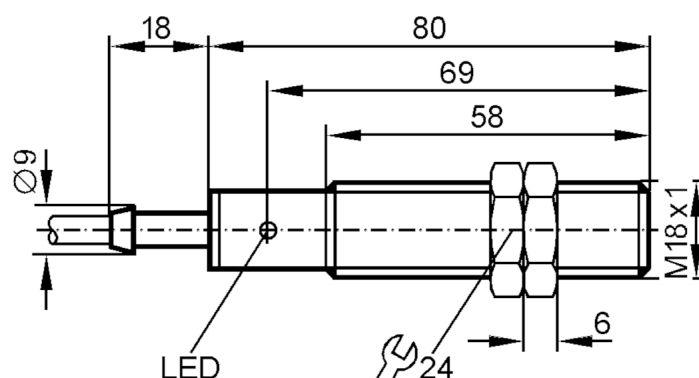

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	15; (24 V)
Protection class		II
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		normally closed
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	300
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Sensing range	[mm]	8
Real sensing range S_r	[mm]	$8 \pm 10 \%$
Operating distance	[mm]	0...6.5



Inductive sensor

IG-3008-APKG/20M

Accuracy / deviations		
Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2	
Hysteresis	[% of Sr]	1...15
Switch point drift	[% of Sr]	-10...10
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection	IP 67	
Tests / approvals		
EMC	EN 60947-5-2	class B
	EN 55011	
MTTF	[years]	1844
Mechanical data		
Weight	[g]	923.6
Housing	threaded type	
Mounting	non-flush mountable	
Dimensions	[mm]	M18 x 1
Thread designation	M18 x 1	
Materials	PBT	
Displays / operating elements		
Display	switching status	1 x LED, yellow
Accessories		
Accessories (supplied)	lock nuts: 2	
	rubber washers: 2 x 24 x 18 x 1	
Remarks		
Pack quantity	1 pcs.	

IG5956




Inductive sensor

IG-3008-APKG/20M

Electrical connection

Cable: 20 m, PVC; 3 x 0.5 mm²

Connection

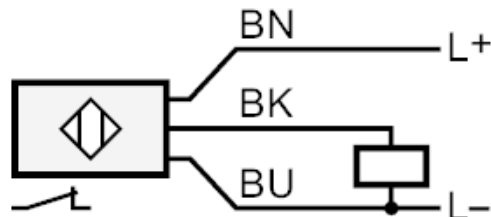

Core colours :

BN =	brown
BU =	blue
BK =	black