




Inductive sensor

ILB30,8-BPKG/2M PVC

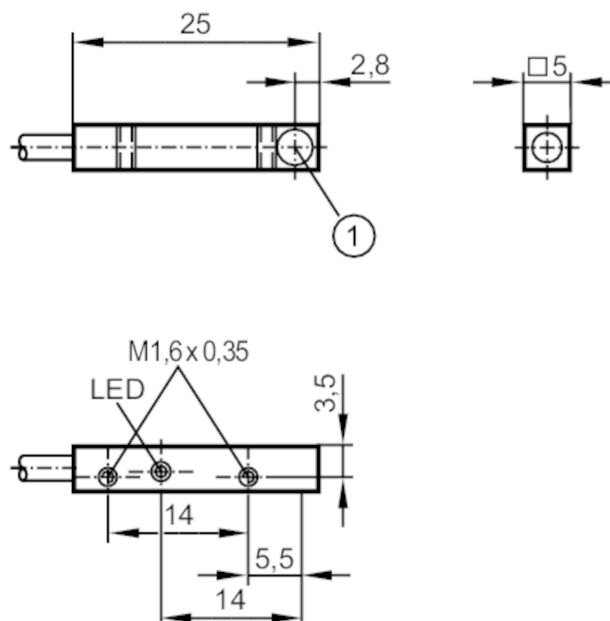

1 Sensing face



Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	10; (24 V)
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	1
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		no

Detection zone

Sensing range	[mm]	0.8
Real sensing range S_r	[mm]	$0.8 \pm 10 \%$
Operating distance	[mm]	0...0.65

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of S_r]	< 15
Switch point drift	[% of S_r]	-10...10


IL5022



Inductive sensor

ILB30,8-BPKG/2M PVC

Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 67
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	640
UL approval	Ta	0...40 °C
	voltage supply	Class 2
	File number UL	E174191
Mechanical data		
Weight	[g]	53.6
Housing		rectangular
Mounting		flush mountable
Dimensions	[mm]	25 x 5 x 5
Materials		housing: aluminium anodised; sensing face: POM
Displays / operating elements		
Display	switching status	1 x LED, red
Accessories		
Accessories (supplied)		screws: 2
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 2 m, PVC; 3 x 0.14 mm ²		
Connection		

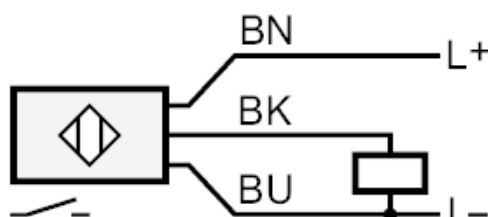

Core colours :

BK =	black
BN =	brown
BU =	blue