


IM511A

Inductive sensor

IMC4040-CPKG/US/3D/3G

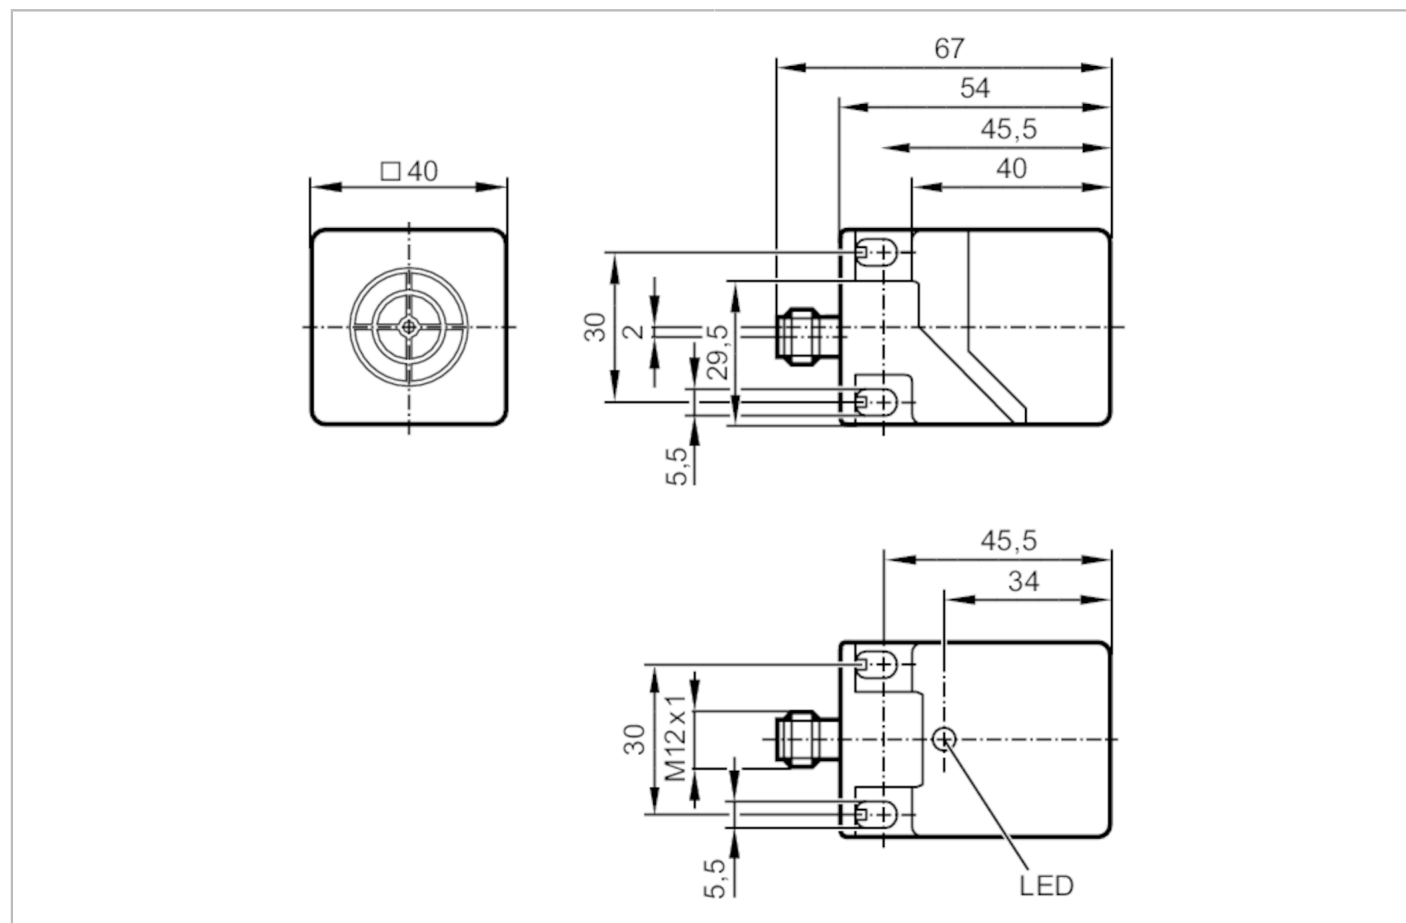

Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 15
Protection class		III
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		complementary
Max. voltage drop switching output DC	[V]	2.5
Max. leakage current	[mA]	0.5
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	60
Short-circuit proof		yes
Overload protection		yes

Detection zone

Sensing range	[mm]	40
Real sensing range S_r	[mm]	$40 \pm 10 \%$
Operating distance	[mm]	0...32.4

IM511A



Inductive sensor

IMC4040-CPKG/US/3D/3G

Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2
Hysteresis	[% of Sr]	1...20
Switch point drift	[% of Sr]	-10...10
Operating conditions		
Ambient temperature		[°C] -20...60
Protection		IP 65; IP 67
Tests / approvals		
ATEX marking		 II 3D Ex tc IIIC T95°C Dc X
		 II 3G Ex nA IIC T4 Gc X
EMC		EN 60947-5-2
MTTF	[years]	1259
Mechanical data		
Weight		[g] 171.5
Housing		rectangular
Mounting		non-flush mountable
Dimensions		[mm] 40 x 40 x 54
Materials		PC; PA; TPE
Displays / operating elements		
Display		switching status 1 x LED, yellow
Remarks		
Remarks		Recommendation: Check the safe functioning of the unit after a short circuit. 5 positions of the active zone possible
Pack quantity		1 pcs.
Electrical connection - plug		
Connector: 1 x M12; Contacts: gold-plated		
		

IM511A



Inductive sensor

IMC4040-CPKG/US/3D/3G

Connection

