

IN508A




Inductive dual sensor for valve actuators

IND3004DBPKG/3D

Status Archive

/IN512A

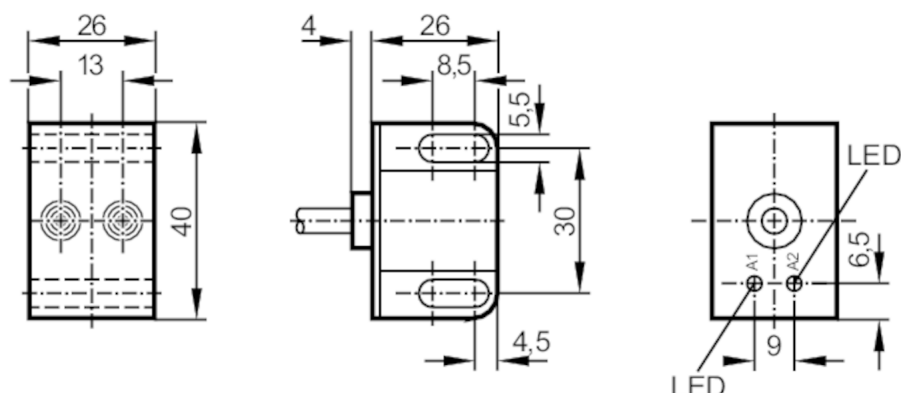

Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 15
Protection class		III
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		2 x normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Short-time current rating of switching output	[mA]	100
Switching frequency DC	[Hz]	1300
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Sensing range	[mm]	4
Real sensing range Sr	[mm]	4 ± 10 %
Operating distance	[mm]	0...3.2

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of Sr]	1...15
Switch point drift	[% of Sr]	-10...10


IN508A



Inductive dual sensor for valve actuators

IND3004DBPKG/3D

Operating conditions		
Ambient temperature	[°C]	-20...60
Protection		IP 67
Tests / approvals		
ATEX marking	 II 3D Ex tD A22 IP67 T80°C X Ta: -20...60°C	
Note on ATEX marking	only in conjunction with the mounting plate	
EMC	EN 60947-5-2	
MTTF	[years]	1089
Mechanical data		
Weight	[g]	0.174
Housing	rectangular	
Mounting	non-flush mountable	
Dimensions	[mm]	40 x 26 x 26
Materials	housing: PBT; cover: PC	
Displays / operating elements		
Display	switching status	2 x LED, yellow
Accessories		
Accessories (supplied)	Mounting plate: 1 socket head screws: 2 x M5 x 35	
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Cable: 2 m, PVC; 4 x 0.34 mm²		
Connection		

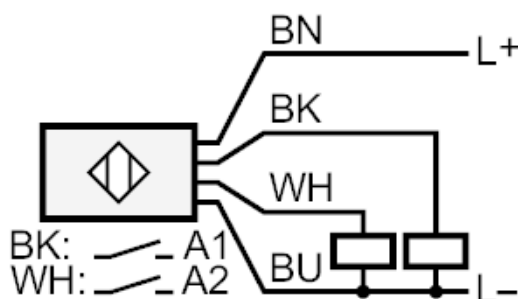

Core colours :

BN =	brown
BU =	blue
BK =	black
WH =	white

IN508A

Inductive dual sensor for valve actuators

IND3004DBPKG/3D



Status Archive

/IN512A