




Inductive sensor

IN-3002-BPKG/6M/PS/55V

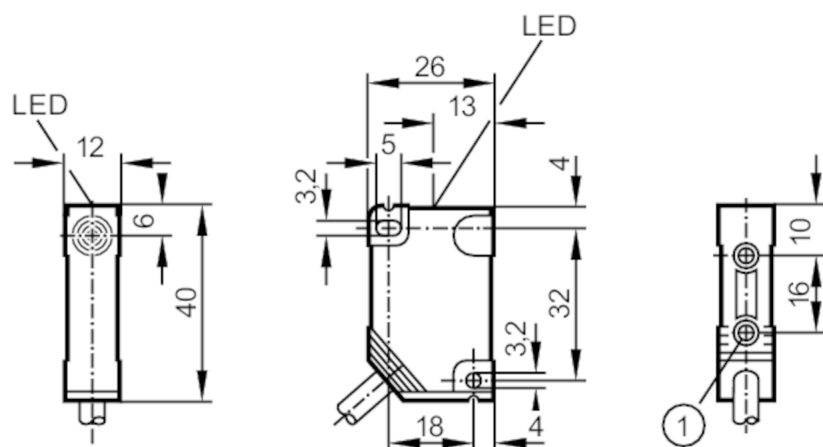

- 1 threaded bush M3 Depth 5.8 mm
Tightening torque maximum 1.2 Nm screw fixing class 8.8
when brass insert in contact with counterpart



Electrical data

Operating voltage [V]	10...55 DC
Current consumption [mA]	15; (55 V)
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	1400
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes

Detection zone

Sensing range [mm]	2
Real sensing range S_r [mm]	$2 \pm 10 \%$
Operating distance [mm]	0...1.6

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2
Hysteresis [% of S_r]	1...15
Switch point drift [% of S_r]	-10...10

IN5227



Inductive sensor

IN-3002-BPKG/6M/PS/55V

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

Tests / approvals

EMC		EN 60947-5-2
MTTF	[years]	1972

Mechanical data

Weight	[g]	286.4
Housing		rectangular
Mounting		flush mountable
Dimensions	[mm]	40 x 12 x 26
Materials		PBT

Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 6 m, PVC; 3 x 0.5 mm²

Connection

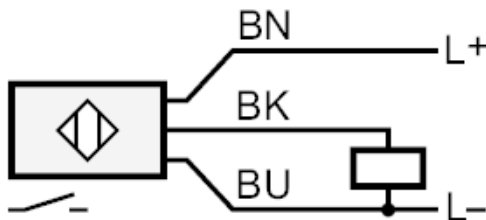

Core colours :

BN =	brown
BU =	blue
BK =	black