




Inductive dual sensor for valve actuators

IND3004DBPKG/US-100-DPV/10-55V

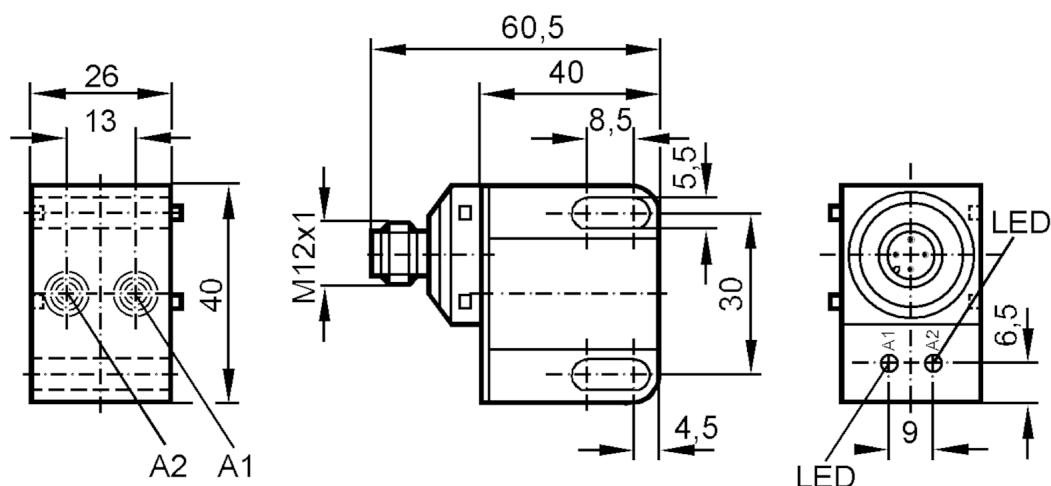

Electrical data

Operating voltage	[V]	10...55 DC
Current consumption	[mA]	< 30
Protection class		III
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		2 x normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	50
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Sensing range	[mm]	4
Real sensing range S_r	[mm]	$4 \pm 10 \%$
Operating distance	[mm]	0...3.25

IN5337



Inductive dual sensor for valve actuators

IND3004DBPKG/US-100-DPV/10-55V

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of Sr]	3...15
Switch point drift	[% of Sr]	-10...10

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67; (if screwed on)

Tests / approvals

EMC		EN 60947-5-2	
		EN 55011	class B
MTTF	[years]		833

Mechanical data

Weight	[g]	69.2
Housing		rectangular
Mounting		non-flush mountable
Materials		PC

Displays / operating elements

Display	switching status	2 x LED, yellow
---------	------------------	-----------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Connector: 1 x M12



Connection

