




Inductive sensor

IS-3002-ANOG

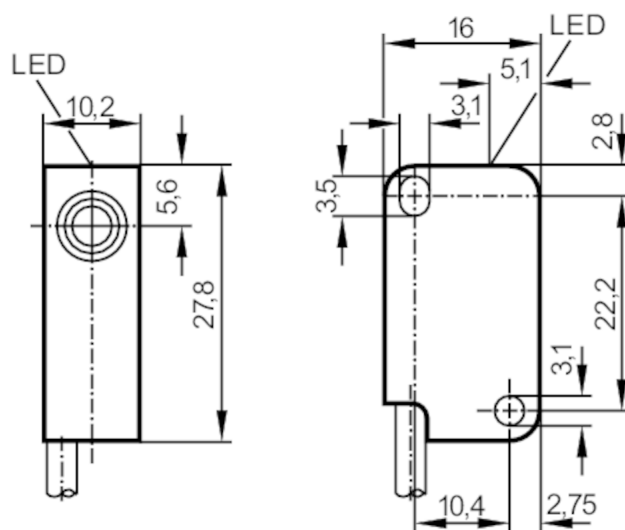

Electrical data

Operating voltage	[V]	10...36 DC; ("supply class 2" to cULus)
Current consumption	[mA]	15; (24 V)
Protection class		III
Reverse polarity protection		no

Outputs

Electrical design		NPN
Output function		normally open
Max. voltage drop switching output DC	[V]	1
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	800
Short-circuit protection		no
Overload protection		no

Detection zone

Sensing range	[mm]	2
Real sensing range S_r	[mm]	$2 \pm 10 \%$
Operating distance	[mm]	0...1.6

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of S_r]	1...15
Switch point drift	[% of S_r]	-10...10

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

IS5003



Inductive sensor

IS-3002-ANOG

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B
MTTF [years]	5436	
UL approval	Ta	-5...80 °C
	Enclosure type	Type 1
	voltage supply	Class 2
	File number UL	E174191

Mechanical data

Weight [g]	43.8
Housing	rectangular
Mounting	flush mountable
Dimensions [mm]	28 x 10 x 16
Materials	PBT
Tightening torque [Nm]	< 0.5; (with washer)

Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 2 m, PVC; 3 x 0.14 mm²

Connection

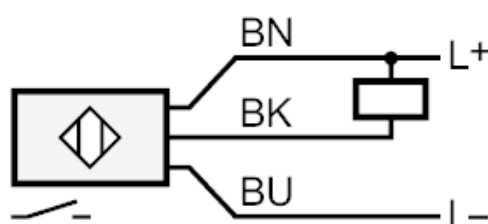

Core colours :

BN =	brown
BU =	blue
BK =	black