


IZ5046



Inductive sensor

IZB31,5-BPKG/AS-514-TPS

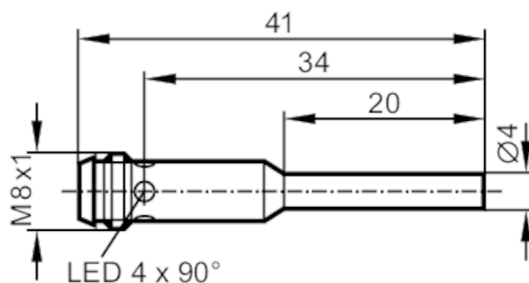

Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	10; (24 V)
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	3
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	1800
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Sensing range	[mm]	1.5
Real sensing range S_r	[mm]	$1.5 \pm 10\%$
Operating distance	[mm]	0...1.2

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of S_r]	< 15
Switch point drift	[% of S_r]	-10...10

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	835
UL approval	Ta	0...40 °C
	voltage supply	Class 2
	File number UL	E174191

IZ5046



Inductive sensor

IZB31,5-BPKG/AS-514-TPS

Mechanical data

Weight	[g]	19.6
Housing		cylindrical
Mounting		non-flush mountable
Dimensions	[mm]	Ø 4 / L = 41
Materials		housing: stainless steel; sensing face: POM

Displays / operating elements

Display	switching status	4 x 90° LED, red
---------	------------------	------------------

Accessories

Accessories (supplied)	Mounting clamps: 1
------------------------	--------------------

Remarks


Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Connector: 1 x M8



Connection

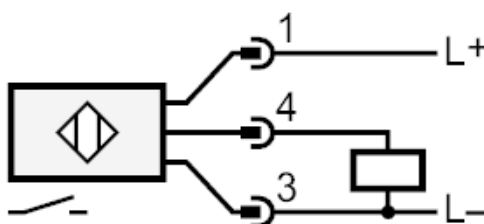

IZ5046




Inductive sensor

IZB31,5-BPKG/AS-514-TPS

Diagrams and graphs

Installation

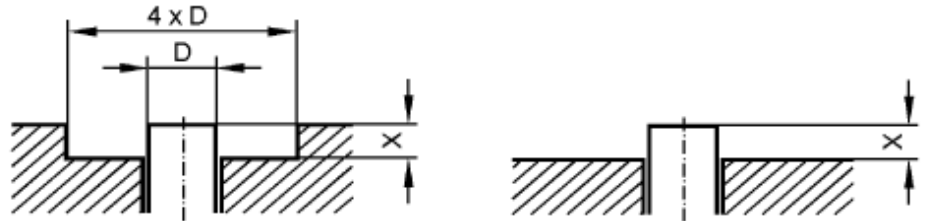

If S_r varies by $< 10\%$ the following free space must be maintained ferromagnetic materials $X > 1.5\text{ mm}$ other metals $X > 3.0\text{ mm}$