

# Product datasheet

## Characteristics

# K150C003HP

cam switch - 3-pole - 90° - 150 A - screw mounting



### Main

Range of product	Harmony K
Product or component type	Complete cam switch
Component name	K150
[I <sub>th</sub> ] conventional free air thermal current	150 A
Product mounting	Front mounting
Fixing mode	4 holes
Cam switch head type	With front plate 88 x 88 mm
Type of operator	Black handle
Rotary handle padlocking	Without
Presentation of legend	With metallic legend, OFF-ON black marking
Cam switch function	Switch
Return	Without
Off position	With Off position
Poles description	3P
Switching positions	Right: 0° - 90°
IP degree of protection	IP40 conforming to IEC 529 IP40 conforming to NF C 20-010

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

### Complementary

Switching angle	90 °
[Ui] rated insulation voltage	690 V (pollution degree 3) conforming to EN 60947-1 690 V (pollution degree 3) conforming to IEC 60947-1
Short-circuit current	25000 A
Short-circuit protection	200 A cartridge fuse, type gG
[Ui <sub>imp</sub> ] rated impulse withstand voltage	6 kV conforming to EN 947-1 6 kV conforming to IEC 947-1
Contact operation	Slow-break
Positive opening	With
Electrical connection	Captive screw clamp terminals flexible, clamping capacity: 1 x 50 mm <sup>2</sup> Captive screw clamp terminals solid, clamping capacity: 1 x 70 mm <sup>2</sup>
Tightening torque	2.5 N.m
Switching capacity in mA	150000 mA DC at 140 V 3 contact(s) for resistive load (T = 1 ms)

150000 mA DC at 24 V 1 contact(s) for inductive load (T = 50 ms)
150000 mA DC at 24 V 1 contact(s) for resistive load (T = 1 ms)
150000 mA DC at 48 V 1 contact(s) for resistive load (T = 1 ms)
150000 mA DC at 48 V 2 contact(s) for inductive load (T = 50 ms)
150000 mA DC at 48 V 2 contact(s) for resistive load (T = 1 ms)
150000 mA DC at 70 V 3 contact(s) for inductive load (T = 50 ms)
150000 mA DC at 70 V 3 contact(s) for resistive load (T = 1 ms)
150000 mA DC at 95 V 2 contact(s) for resistive load (T = 1 ms)
50000 mA DC at 30 V 1 contact(s) for inductive load (T = 50 ms)
50000 mA DC at 60 V 2 contact(s) for inductive load (T = 50 ms)
50000 mA DC at 90 V 3 contact(s) for inductive load (T = 50 ms)

Mechanical durability	300000 cycles
CAD overall width	88 mm
CAD overall height	88 mm
CAD overall depth	140 mm
Product weight	0.79 kg

## Environment

Standards	EN/IEC 60947-3
Product certifications	CULus 240 V 15 hp 1 phase CULus 240 V 25 hp 3 phases CULus 480 V 40 hp 3 phases CULus 120 V 7.5 hp 1 phase
Protective treatment	TC
Ambient air temperature for operation	-25...55 °C
Ambient air temperature for storage	-40...70 °C
Electrical shock protection class	Class II conforming to IEC 60536 Class II conforming to NF C 20-030

## Offer Sustainability


REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	<a href="#">China RoHS declaration</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

## Contractual warranty

Warranty	18 months
----------	-----------

## Dimensions

### Rear Mounting

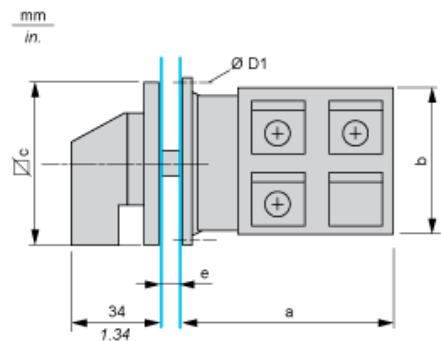

e support panel thickness 0.5 to 5.5 mm / 0.02 to 0.22 in in.


a		b		c		D1	
mm	in.	mm	in.	mm	in.	mm	in.
100	3.94	88	3.46	88	3.46	5.4	0.21

---

Panel Cut-Out

---

Front Mounting

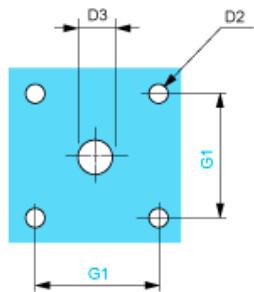

D2		D3		G1	
mm	in.	mm	in.	mm	in.
6	0.24	13	0.51	68	2.68


---

### Link Positions (Factory Mounted)

---

#### Diagram for 3 to 4-pole Switches

Select the number of poles according to the product characteristics

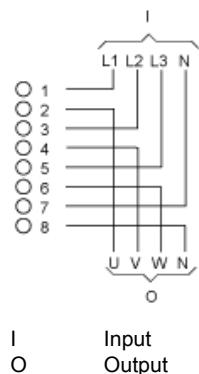


I      Input  
O      Output

---

Marking

---



---

Angular Position of Switch

---




---

## Switching Program

---

### Diagram for 3 to 4-pole Switches

Select the number of poles according to the product characteristics



---

### Convention Used for Switching Program Representation

---

Contact closed

Contact closed in 2 positions and maintained between the 2 positions

Sealed assembly for auto-maintain control

Overlapping contacts

Spring return position: for a switching angle of 90°, spring return is over 30° after the last position (for a maximum of 3 simultaneous contacts).

Example:

