



## Main

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Range of product                                         | Harmony K                     |
| Product or component type                                | Cam switch body               |
| Component name                                           | K2                            |
| [I <sub>th</sub> ] conventional free air thermal current | 20 A                          |
| Sub-assembly composition                                 | Contact blocks + fixing plate |
| Cam switch function                                      | Switch                        |
| Off position                                             | With Off position             |
| Poles description                                        | 5P                            |
| Switching positions                                      | Right: 0° - 45°               |
| Product mounting                                         | Front mounting                |
| Fixing mode                                              | Ø 22 mm hole                  |
| Bezel material                                           | Plastic                       |

## Complementary

|                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Switching angle                                           | 45 °                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| [U <sub>i</sub> ] rated insulation voltage                | 690 V degree of pollution 3 conforming to IEC 60947-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| [I <sub>the</sub> ] conventional enclosed thermal current | 16 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Rated operational power in W                              | 8000 W AC-21 / 230 V 3 phases conforming to IEC 947-3<br>5500 W AC-23A / 690 V 3 phases conforming to IEC 947-3<br>5500 W AC-23A / 500 V 3 phases conforming to IEC 947-3<br>5500 W AC-23A / 400 V 3 phases conforming to IEC 947-3<br>4000 W AC-3 / 690 V 3 phases conforming to IEC 947-3<br>4000 W AC-3 / 500 V 3 phases conforming to IEC 947-3<br>4000 W AC-3 / 400 V 3 phases conforming to IEC 947-3<br>4000 W AC-23A / 230 V 3 phases conforming to IEC 947-3<br>2200 W AC-3 / 400 V 1 phase conforming to IEC 947-3<br>2200 W AC-3 / 230 V 3 phases conforming to IEC 947-3<br>17000 W AC-21 / 500 - 660 V 3 phases conforming to IEC 947-3<br>14000 W AC-21 / 400 V 3 phases conforming to IEC 947-3<br>1300 W AC-3 / 230 V 1 phase conforming to IEC 947-3 |
| [I <sub>e</sub> ] rated operational current AC            | 8.9 A at 500 V AC-23A 3 phases conforming to IEC 947-3<br>8.3 A at 230 V AC-3 3 phases conforming to IEC 947-3<br>6.5 A at 500 V AC-3 3 phases conforming to IEC 947-3<br>6.4 A at 690 V AC-23A 3 phases conforming to IEC 947-3<br>4.7 A at 690 V AC-3 3 phases conforming to IEC 947-3<br>14.6 A at 230 V AC-23A 3 phases conforming to IEC 947-3<br>10.8 A at 400 V AC-23A 3 phases conforming to IEC 947-3<br>8 A at 400 V AC-3 3 phases conforming to IEC 947-3<br>4 A at 230 V AC-15 conforming to IEC 947-5-1<br>3 A at 400 V AC-15 conforming to IEC 947-5-1<br>2 A at 500 V AC-15 conforming to IEC 947-5-1                                                                                                                                                  |
| Electrical durability                                     | 600000 cycles AC-21<br>600000 cycles AC-15<br>200000 cycles AC-3<br>200000 cycles AC-23                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Operating rate                                            | 8.333 cyc/mn AC-15<br>2.5 cyc/mn AC-3<br>2.5 cyc/mn AC-23<br>2.5 cyc/mn AC-21                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Short-circuit current                                     | 10000 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Short circuit protection                                  | 20 A by cartridge fuse, type gG                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| [U <sub>imp</sub> ] rated impulse withstand voltage       | 6 kV conforming to IEC 947-1<br>4 kV in isolating function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Contacts operation                                        | Slow-break                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

|                       |                                                                                                                                 |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Positive opening      | With                                                                                                                            |
| Electrical connection | Captive screw clamp terminals solid, 1 x 2.5 mm <sup>2</sup><br>Captive screw clamp terminals flexible, 2 x 1.5 mm <sup>2</sup> |
| Mechanical durability | 1000000 cycles                                                                                                                  |
| Product weight        | 0.13 kg                                                                                                                         |

## Environment


|                                            |                                                                                                                                                            |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standards                                  | IEC 60947-5-1 for control circuit<br>IEC 60947-3 for power circuit<br>EN 60947-5-1 for control circuit<br>EN 60947-3 for power circuit<br>CENELEC EN 50013 |
| Product certifications                     | UL 240 V 0.33 hp 1 phase 2 -pole(s)<br>UL 240 V 1 hp 3 phases<br>CSA 240 V 3 hp 3 phases 2 -pole(s)<br>CSA 240 V 1 hp 1 phase                              |
| Protective treatment                       | TC                                                                                                                                                         |
| Ambient air temperature for operation      | -25...55 °C                                                                                                                                                |
| Ambient air temperature for storage        | -40...70 °C                                                                                                                                                |
| Shock resistance                           | 30 gn conforming to IEC 68-2-27                                                                                                                            |
| Vibration resistance                       | 5 gn, 10...150 Hz conforming to IEC 68-2-6                                                                                                                 |
| Class of protection against electric shock | Class II conforming to NF C 20-030<br>Class II conforming to IEC 536                                                                                       |

---

Body with Plastic Base

---

Front Mounting by Ø 22 mm/0.87 in. Hole

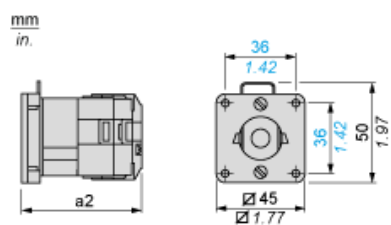


a2 69 mm/2.78 in.

## Link Positions (Factory Mounted)


### Diagram for 1 to 8-pole Switches

Select the number of poles according to the product characteristics.

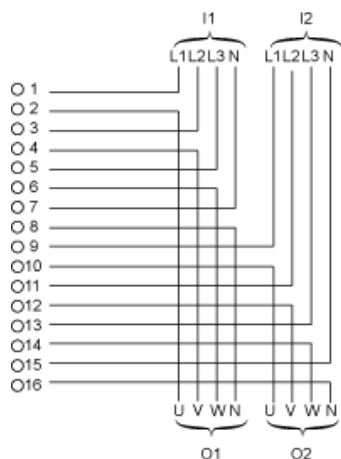

- I1 Input 1
- I2 Input 2
- O1 Output 1
- O2 Output 2


## Angular Position of Switch



## Switching Program

### Diagram for 1 to 8-pole Switches

Select the number of poles according to the product characteristics.



- (1) 1-pole
- (2) 2-pole
- (3) 3-pole
- (4) 4-pole
- (5) 5-pole
- (6) 6-pole
- (7) 7-pole
- (8) 8-pole

## Convention Used for Switching Program Representation

 Contact closed

 Contact closed in 2 positions and maintained between the 2 positions

 Sealed assembly for auto-maintain control

 Overlapping contacts

 Spring return position: for a switching angle of  $90^\circ$ , spring return is over  $30^\circ$  after the last position (for a maximum of 3 simultaneous contacts).

Example:

