


KG5070



Capacitive sensor

KG-3080NFPKGS2T/10M

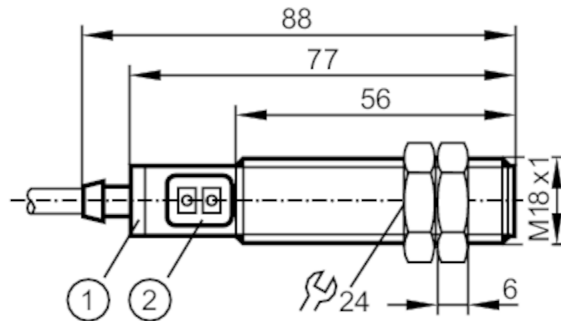

- 1 LED ring
- 2 programming buttons



Application

Recommended media: conductive media with a dielectric constant > 20

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	< 20
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	normally open / normally closed; (selectable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	10
Short-circuit proof	yes
Overload protection	yes

Detection zone

Sensing range [mm]	8
Real sensing range Sr [mm]	8 ± 10 %

Accuracy / deviations

Correction factor	glass: 0.4 / water: 1 / ceramics: 0.2 / PVC: 0.1
Hysteresis [% of Sr]	1...15
Switch point drift [% of Sr]	-20...20

Operating conditions

Ambient temperature [°C]	-25...80
Protection	IP 65; IP 67

Tests / approvals

EMC	EN 60947-5-2
MTTF [years]	672

KG5070



Capacitive sensor

KG-3080NFPKGS2T/10M

Mechanical data		
Weight	[g]	374.2
Housing		threaded type
Mounting		non-flush mountable
Dimensions	[mm]	M18 x 1 / L = 77
Thread designation		M18 x 1
Materials		housing: PP white; Sealing: TPE-U; pushbuttons: TPE-U


Displays / operating elements		
Display	switching status	1 x LED ring, yellow cable entry lights translucently
	operation	1 x LED, green
Teach function		yes
Electronic lock		yes

Accessories	
Accessories (supplied)	lock nuts: 2

Remarks	
Pack quantity	1 pcs.

Electrical connection	
Cable: 10 m, PVC; conduit attachment; 3 x 0.34 mm²	

Connection	
------------	--

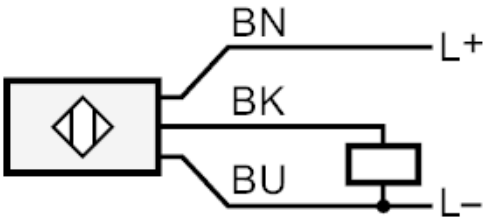

	Core colours :
BK =	black
BN =	brown
BU =	blue