


KT5106



Capacitive illuminated pushbutton

KTMSF-K-RBPKG/US/0,3M

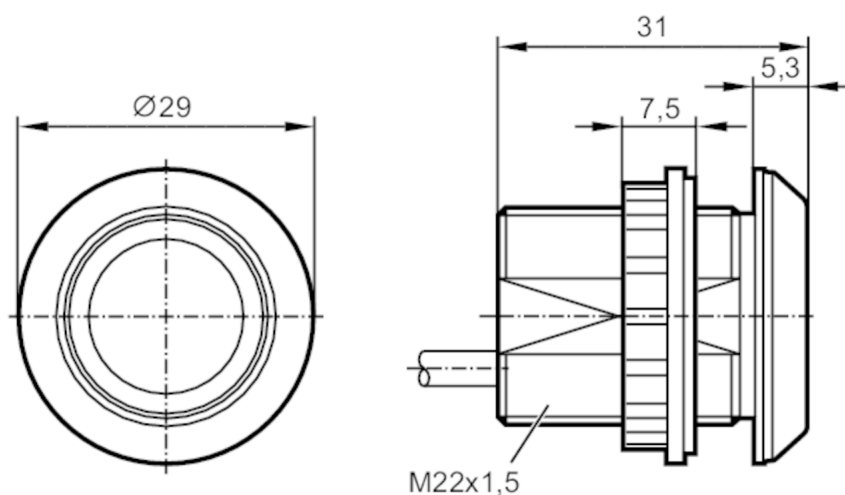

Application

Operating principle	static
---------------------	--------

Electrical data

Operating voltage [V]	12...30 DC
Current consumption [mA]	30
Protection class	III
Reverse polarity protection	yes
Max. power-on delay time [ms]	500

Outputs

Electrical design	PNP
Output function	normally open
Permanent current rating of switching output DC [mA]	200
Short-circuit protection	yes
Overload protection	yes

Response times

Response time [ms]	35
--------------------	----

Operating conditions

Ambient temperature [°C]	-40...85
Protection	IP 65; IP 67; IP 69K; (on the front)

Tests / approvals

MTTF [years]	352
--------------	-----

Mechanical data

Weight [g]	55.6
Dimensions [mm]	Ø 29 / L = 31
Materials	PA 6.6-GF30 black; active face: PA Grilamid TR 90UV

KT5106



Capacitive illuminated pushbutton


KTMSF-K-RBPKG/US/0,3M

Displays / operating elements		
Display	switching status	1 x LED, red
	operation	1 x LED, green
Electrical connection		
Connection	plug	
Accessories		
Accessories (supplied)	lock nuts: 1	
	Gasket: 1	
Accessories (optional)	symbol disc	
Remarks		
Pack quantity	1 pcs.	

Electrical connection - plug

Cable: 0.3 m, PUR

Connector: 1 x M12



Connection

