

KT5305




Capacitive illuminated pushbutton

KTMSF-E-RBPKG/0,3M

Status Archive

/KT5310

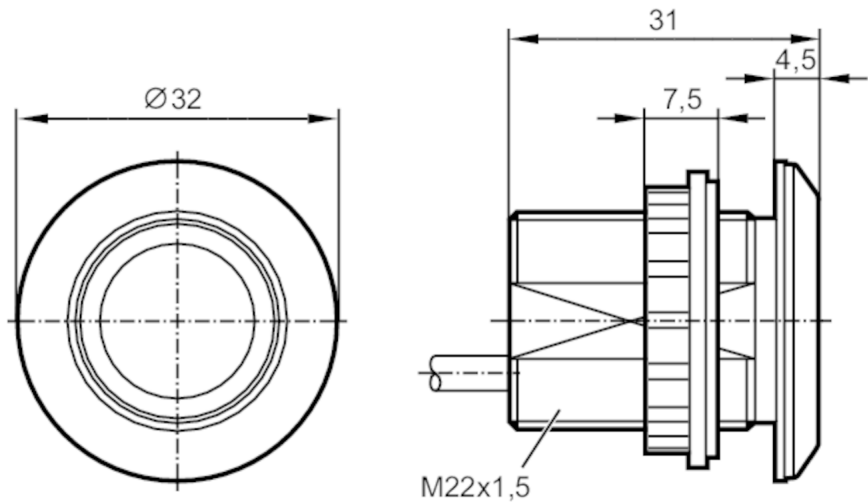

Application		
Operating principle		static
Electrical data		
Operating voltage	[V]	12...30 DC
Current consumption	[mA]	30
Protection class		III
Reverse polarity protection		yes
Max. power-on delay time	[ms]	500
Outputs		
Electrical design		PNP
Output function		normally open
Permanent current rating of switching output DC	[mA]	200
Short-circuit protection		yes
Overload protection		yes
Response times		
Response time	[ms]	35
Operating conditions		
Ambient temperature	[°C]	-40...85
Protection		IP 65; IP 67; IP 69K; (on the front)
Mechanical data		
Weight	[g]	64.2
Dimensions	[mm]	Ø 32 / L = 31
Materials		stainless steel (1.4404 / 316L); active face: PA Grilamid TR 90UV


KT5305



Capacitive illuminated pushbutton

KTMSF-E-RBPKG/0,3M

Displays / operating elements		
Display	switching status	1 x LED, red
	operation	1 x LED, green
Accessories		
Accessories (supplied)	lock nuts: 1	
	Gasket: 1	
Accessories (optional)	symbol disc	
Remarks		
Notes	discontinued article	
Pack quantity	1 pcs.	
Electrical connection		
Cable: 0.3 m, PUR		
Connection		

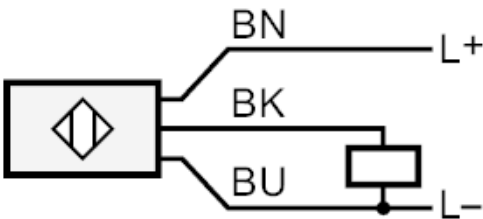

	Core colours :
BK =	black
BN =	brown
BU =	blue

Status Archive

/KT5310