

# LC1F500P7

TeSys F contactor - 3P (3 NO) - AC-3 -  $\leq 440$  V  
500 A - coil 230 V AC



Price\* : 1,795.92 GBP



## Main

|                                |                                                                                                                                                                                                                                                                                                                                |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range                          | TeSys                                                                                                                                                                                                                                                                                                                          |
| Product name                   | TeSys F                                                                                                                                                                                                                                                                                                                        |
| Product or component type      | Contactor                                                                                                                                                                                                                                                                                                                      |
| Device short name              | LC1F                                                                                                                                                                                                                                                                                                                           |
| Contactor application          | Motor control<br>Resistive load                                                                                                                                                                                                                                                                                                |
| Utilisation category           | AC-1<br>AC-4<br>AC-3                                                                                                                                                                                                                                                                                                           |
| Poles description              | 3P                                                                                                                                                                                                                                                                                                                             |
| Power pole contact composition | 3 NO                                                                                                                                                                                                                                                                                                                           |
| [Ue] rated operational voltage | $\leq 1000$ V AC 50/60 Hz<br>$\leq 460$ V DC                                                                                                                                                                                                                                                                                   |
| [Ie] rated operational current | 700 A (at $\leq 40$ °C) at $\leq 440$ V AC AC-1<br>500 A (at $\leq 55$ °C) at $\leq 440$ V AC AC-3                                                                                                                                                                                                                             |
| Motor power kW                 | 250 kW at 380...400 V AC 50/60 Hz (AC-3)<br>280 kW at 415 V AC 50/60 Hz (AC-3)<br>295 kW at 440 V AC 50/60 Hz (AC-3)<br>355 kW at 500 V AC 50/60 Hz (AC-3)<br>335 kW at 660...690 V AC 50/60 Hz (AC-3)<br>335 kW at 1000 V AC 50/60 Hz (AC-3)<br>147 kW at 220...230 V AC 50/60 Hz (AC-3)<br>80 kW at 400 V AC 50/60 Hz (AC-4) |
| [Uc] control circuit voltage   | 230 V AC 40...400 Hz                                                                                                                                                                                                                                                                                                           |

## Complementary

|                                             |                  |
|---------------------------------------------|------------------|
| [Uimp] rated impulse withstand voltage      | 8 kV             |
| Overvoltage category                        | III              |
| [Ith] conventional free air thermal current | 700 A (at 40 °C) |

|                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated breaking capacity                               | 4000 A conforming to IEC 60947-4-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| [I <sub>cw</sub> ] rated short-time withstand current | 4200 A 40 °C - 10 s<br>3200 A 40 °C - 30 s<br>2400 A 40 °C - 1 min<br>1500 A 40 °C - 3 min<br>1200 A 40 °C - 10 min                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Associated fuse rating                                | 500 A aM at ≤ 440 V<br>800 A gG at ≤ 440 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Average impedance                                     | 0.18 mOhm - I <sub>th</sub> 700 A 50 Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| [U <sub>i</sub> ] rated insulation voltage            | 1000 V conforming to IEC 60947-4-1<br>1500 V conforming to VDE 0110 group C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Power dissipation per pole                            | 88 W AC-1<br>45 W AC-3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Mounting support                                      | Plate                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Standards                                             | IEC 60947-4-1<br>JIS C8201-4-1<br>EN 60947-1<br>IEC 60947-1<br>EN 60947-4-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Product certifications                                | DNV<br>RINA<br>RMRoS<br>ABS<br>UL<br>CSA<br>BV<br>CB<br>LROS (Lloyds register of shipping)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Connections - terminals                               | Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> flexible without cable end<br>Control circuit: screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> flexible without cable end<br>Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> flexible with cable end<br>Control circuit: screw clamp terminals 2 cable(s) 1...2.5 mm <sup>2</sup> flexible with cable end<br>Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> solid without cable end<br>Control circuit: screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> solid without cable end<br>Power circuit: bar 2 cable(s) - busbar cross section: 40 x 5 mm<br>Power circuit: lugs-ring terminals 2 cable(s) 240 mm <sup>2</sup><br>Power circuit: bolted connection |
| Tightening torque                                     | Control circuit: 1.2 N.m<br>Power circuit: 35 N.m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Control circuit voltage limits                        | Operational: 0.85...1.1 U <sub>c</sub> 40...400 Hz (at 55 °C)<br>Drop-out: 0.3...0.5 U <sub>c</sub> 40...400 Hz (at 55 °C)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Inrush power in VA                                    | 1100 VA 40...400 Hz cos phi 0.9 (at 20 °C)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Hold-in power consumption in VA                       | 18 VA 40...400 Hz cos phi 0.9 (at 20 °C)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Heat dissipation                                      | 18 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Operating time                                        | 40...65 ms closing<br>100...170 ms opening                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Mechanical durability                                 | 10 Mcycles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Maximum operating rate                                | 2400 cyc/h 55 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Compatibility code                                    | LC1F                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Motor power range                                     | 250...500 kW at 380...440 V 3 phases<br>110...220 kW at 380...440 V 3 phases<br>110...220 kW at 200...240 V 3 phases<br>250...500 kW at 480...500 V 3 phases                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Motor starter type                                    | Direct on-line contactor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Contactor coil voltage                                | 230 V AC standard                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## Environment

|                                       |                                                                                                             |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------|
| IP degree of protection               | IP20 front face with shrouds conforming to IEC 60529<br>IP20 front face with shrouds conforming to VDE 0106 |
| Protective treatment                  | TH                                                                                                          |
| Ambient air temperature for operation | -5...55 °C                                                                                                  |
| Ambient air temperature for storage   | -60...80 °C                                                                                                 |

|                                                       |                |
|-------------------------------------------------------|----------------|
| Permissible ambient air temperature around the device | -40...70 °C    |
| Operating altitude                                    | 3000 m without |
| Height                                                | 238 mm         |
| Width                                                 | 233 mm         |
| Depth                                                 | 232 mm         |
| Product weight                                        | 11.35 kg       |

### Offer Sustainability


|                            |                                                                                                                             |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                       |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                                                           |
| EU RoHS Directive          | Compliant<br><a href="#">EU RoHS Declaration</a>                                                                            |
| Mercury free               | Yes                                                                                                                         |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                         |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a><br>Product out of China RoHS scope. Substance declaration for your information       |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                               |
| Circularity Profile        | <a href="#">End of Life Information</a>                                                                                     |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions and Drawings

### LC1 F400 and F500

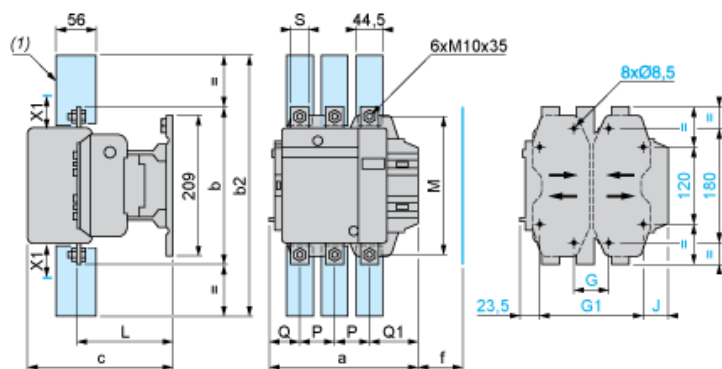

(1) Power terminal protection shroud

NOTE: X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.


| LC1  | 200...500 V | 600...1000 V |
|------|-------------|--------------|
| F400 | 15          | 20           |
| F500 | 15          | 20           |

| LC1  |    | a   | b   | b2  | c   | f   | G suppl | G min. | G max | G1 sup | G1 min | G1 max | J    | L   | M   | P  | Q  | Q1  | S  |
|------|----|-----|-----|-----|-----|-----|---------|--------|-------|--------|--------|--------|------|-----|-----|----|----|-----|----|
| F400 | 2P | 213 | 206 | 375 | 219 | 146 | 80      | 66     | 102   | 170    | 156    | 192    | 19.5 | 145 | 181 | 48 | 69 | 96  | 25 |
|      | 3P | 213 | 206 | 375 | 219 | 146 | 80      | 66     | 102   | 170    | 156    | 192    | 19.5 | 145 | 181 | 48 | 43 | 74  | 25 |
|      | 4P | 261 | 206 | 375 | 219 | 146 | 80      | 66     | 150   | 170    | 156    | 240    | 67.5 | 145 | 181 | 48 | 43 | 74  | 25 |
| F500 | 2P | 233 | 238 | 400 | 232 | 150 | 80      | 66     | 120   | 170    | 156    | 210    | 39.5 | 146 | 208 | 55 | 76 | 102 | 30 |
|      | 3P | 233 | 238 | 400 | 232 | 150 | 80      | 66     | 120   | 170    | 156    | 210    | 39.5 | 146 | 208 | 55 | 46 | 77  | 30 |
|      | 4P | 288 | 238 | 400 | 232 | 150 | 140     | 66     | 175   | 230    | 156    | 265    | 34.5 | 146 | 208 | 55 | 46 | 77  | 30 |

### TeSys F reversing contactors and changeover contactor pairs Vertically mounted

NOTE: For customer assembly, with mechanical interlock (MI) LA9 F, fixing recommended on AM1 EC uprights (please consult your Regional Sales Office). 2 x LC1 identical or different ratings (LC1 F115 to F630 and F800).

Assembly A

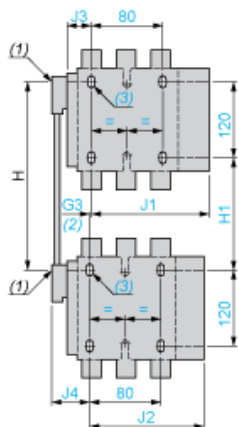

- (1) Mechanical interlock shaft.  
 (2) For assembly of contactors of different ratings only.  
 (3) 4 x Ø6.5 for LC1 F115 to F225.


Assembly A<sup>(7)</sup> - Mechanical interlock reference

|          | G3 3P | G3 4P | H min. | H max. | H1 min. | H1 max. | J1 3P | J1 4P |
|----------|-------|-------|--------|--------|---------|---------|-------|-------|
| LA9 FF4F | 0     | 0     | 200    | 310    | 80      | 190     | 137   | 155.5 |
| LA9 FG4F | 3     | 4     | 210    | 300    | 90      | 180     | 139.5 | 159.5 |
| LA9 FG4G | 0     | 0     | 220    | 310    | 100     | 190     | 139.5 | 159.5 |

|          | J2 3P | J2 4P | J3 3P | J3 4P | J4 3P | J4 4P |
|----------|-------|-------|-------|-------|-------|-------|
| LA9 FF4F | 137   | 155.5 | 48.5  | 67    | 48.5  | 67    |
| LA9 FG4F | 137   | 155.5 | 53    | 73    | 54    | 69    |
| LA9 FG4G | 139.5 | 159.5 | 53    | 73    | 53    | 73    |

Assembly B

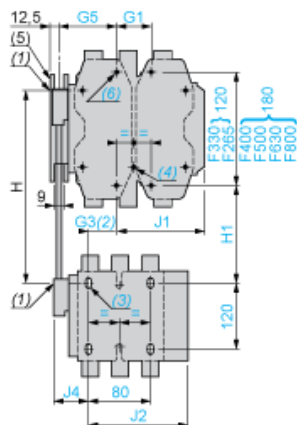


- (4) 4 x Ø6.5 for LC1 F265.  
 (5) Mechanical interlock guide bracket.

Assembly B<sup>(7)</sup> - Mechanical interlock reference


|          | G1 3P | G1 4P | G3 3P | G3 4P | G5 3P | G5 4P | H min. | H max. |
|----------|-------|-------|-------|-------|-------|-------|--------|--------|
| LA9 FH4F | 96    | 96    | 21    | 27    | 60    | 83    | 240    | 380    |
| LA9 FJ4F | 80    | 80    | 45    | 26    | 83    | 83    | 250    | 380    |
| LA9 FK4F | 80    | 140   | 45    | 26    | 83    | 83    | 270    | 380    |
| LA9 FL4F | 180   | 240   | 35    | 17    | 74    | 74    | 310    | 380    |
| LA9 FH4G | 96    | 96    | 19    | 23    | 60    | 83    | 250    | 380    |
| LA9 FJ4G | 80    | 80    | 42    | 22    | 83    | 83    | 250    | 380    |
| LA9 FK4G | 80    | 140   | 42    | 22    | 83    | 83    | 270    | 380    |
| LA9 FL4G | 180   | 240   | 33    | 13    | 74    | 74    | 310    | 380    |

|          | H1 min. | H1 max. | J1 3P | J1 4P | J2 3P | J2 4P | J4 3P | J4 4P |
|----------|---------|---------|-------|-------|-------|-------|-------|-------|
| LA9 FH4F | 110     | 250     | 157.5 | 181.5 | 137   | 155.5 | 48.5  | 67    |
| LA9 FJ4F | 80      | 210     | 144.5 | 192.5 | 137   | 155.5 | 48.5  | 67    |
| LA9 FK4F | 100     | 210     | 164.5 | 219.5 | 137   | 155.5 | 48.5  | 67    |
| LA9 FL4F | 140     | 210     | 248.5 | 328.5 | 137   | 155.5 | 48.5  | 67    |
| LA9 FH4G | 120     | 250     | 157.5 | 181.5 | 139.5 | 159.5 | 53    | 73    |
| LA9 FJ4G | 90      | 220     | 144.5 | 192.5 | 139.5 | 159.5 | 53    | 73    |
| LA9 FK4G | 110     | 220     | 164.5 | 219.5 | 139.5 | 159.5 | 53    | 73    |
| LA9 FL4G | 150     | 220     | 248.5 | 328.5 | 139.5 | 159.5 | 53    | 73    |

#### Assembly C

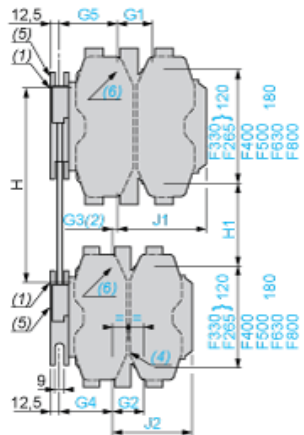

(6) 4 x Ø8.5 for LC1 F400, F500 or 4 x Ø10.5 for LC1 F630 and F800.

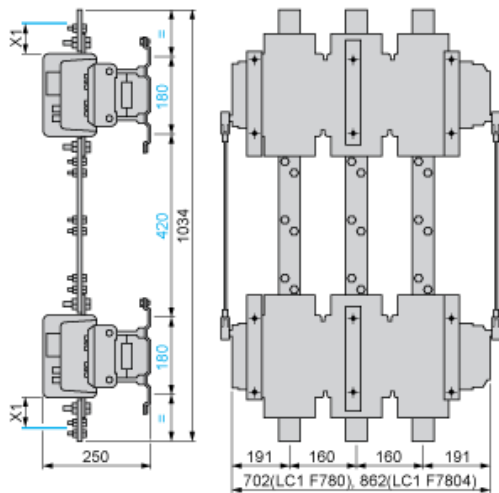

(7) Only 3P for F800.

(8) In this case, G4 is greater than G5.

#### Assembly C<sup>(7)</sup>

|          | G1 3P | G1 4P | G2 3P | G2 4P | G3 3P            | G3 4P            | G4 3P | G4 4P | G5 3P | G5 4P |
|----------|-------|-------|-------|-------|------------------|------------------|-------|-------|-------|-------|
| LA9 FH4H | 96    | 96    | 96    | 96    | 0                | 0                | 60    | 83    | 60    | 83    |
| LA9 FJ4H | 80    | 80    | 96    | 96    | 23               | 0                | 60    | 83    | 83    | 83    |
| LA9 FK4H | 80    | 140   | 96    | 96    | 23               | 0                | 60    | 83    | 83    | 83    |
| LA9 FL4H | 180   | 240   | 96    | 96    | 14               | g <sup>(8)</sup> | 60    | 83    | 74    | 74    |
| LA9 FJ4J | 80    | 80    | 80    | 80    | 0                | 0                | 83    | 83    | 83    | 83    |
| LA9 FK4J | 80    | 140   | 80    | 80    | 0                | 0                | 83    | 83    | 83    | 83    |
| LA9 FL4J | 180   | 240   | 80    | 80    | g <sup>(8)</sup> | g <sup>(8)</sup> | 83    | 83    | 74    | 74    |


|          | G1 3P | G1 4P | G2 3P | G2 4P | G3 3P            | G3 4P            | G4 3P | G4 4P | G5 3P | G5 4P |
|----------|-------|-------|-------|-------|------------------|------------------|-------|-------|-------|-------|
| LA9 FK4K | 80    | 140   | 80    | 140   | 0                | 0                | 83    | 83    | 83    | 83    |
| LA9 FL4K | 180   | 240   | 80    | 140   | g <sup>(8)</sup> | g <sup>(8)</sup> | 83    | 83    | 74    | 74    |
| LA9 FL4L | 180   | 240   | 180   | 240   | 0                | 0                | 74    | 74    | 74    | 74    |

|          | H min. | H max. | H1 min. | H1 max. | J1 3P | J1 4P | J2 3P | J2 4P |
|----------|--------|--------|---------|---------|-------|-------|-------|-------|
| LA9 FH4H | 250    | 380    | 130     | 260     | 157.5 | 181.5 | 157.5 | 181.5 |
| LA9 FJ4H | 260    | 380    | 110     | 230     | 144.5 | 192.5 | 157.5 | 181.5 |
| LA9 FK4H | 280    | 380    | 130     | 230     | 164.5 | 219.5 | 157.5 | 181.5 |
| LA9 FL4H | 330    | 380    | 170     | 220     | 248.5 | 328.5 | 157.5 | 181.5 |
| LA9 FJ4J | 260    | 380    | 60      | 200     | 144.5 | 192.5 | 144.5 | 192.5 |
| LA9 FK4J | 280    | 380    | 100     | 200     | 164.5 | 219.5 | 144.5 | 192.5 |
| LA9 FL4J | 325    | 380    | 140     | 195     | 248.5 | 329.5 | 144.5 | 192.5 |
| LA9 FK4K | 300    | 380    | 120     | 200     | 164.5 | 329.5 | 164.5 | 219.5 |
| LA9 FL4K | 345    | 380    | 160     | 195     | 248.5 | 328.5 | 164.5 | 219.5 |
| LA9 FL4L | 380    | 380    | 200     | 200     | 248.5 | 328.5 | 248.5 | 328.5 |

## Connections and Schema

### 2, 3, and 4-pole Contactors



LC1 F115 to F630, F1250 (coil LX1 F ~)



LC1 F115 to F630 , F1250 (coil LX4 F ---)

LC1 F115 to F265 (coil LX9 F ~)

LC1 F800 (coil LX8 F ~ / ---)