


Continuous level sensor (guided wave radar)

LR0000B-BN34AMPKG/US



- 1 alphanumeric display 4-digit
- 2 LEDs Display unit / switching status
- 3 programming buttons
- A active range
- I1 / I2 inactive ranges

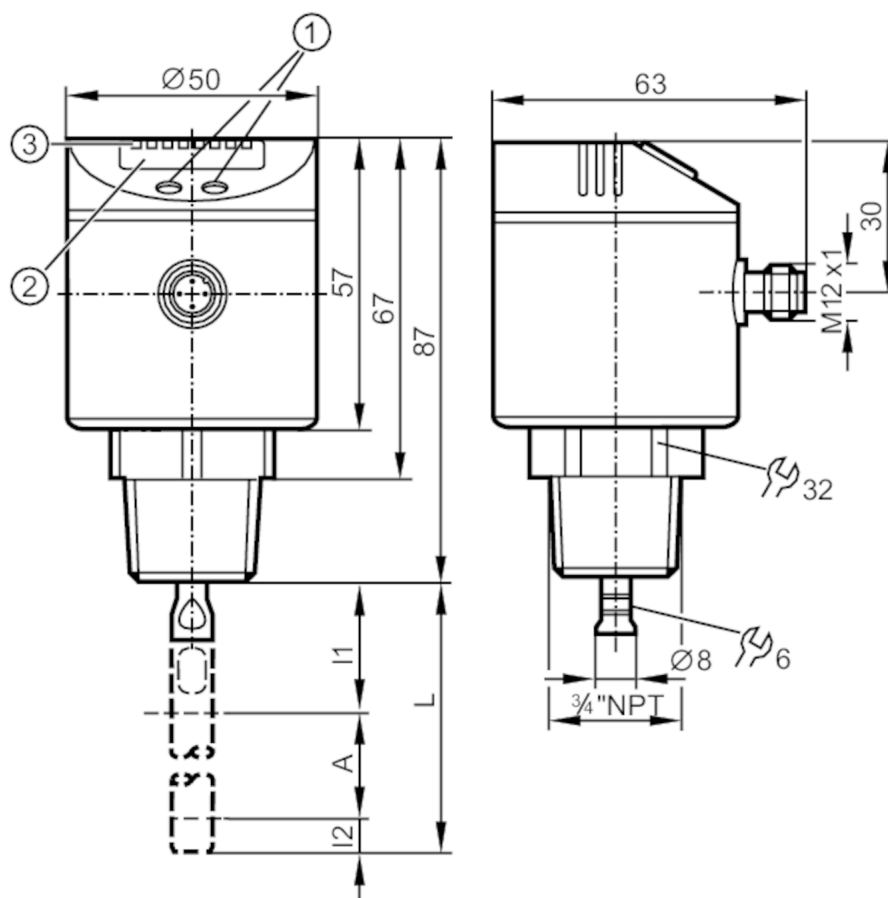

Application

Media	hydrous coolants; water; media similar to water
Dielectric constant of the medium	≥ 20
Recommended media	hydrous coolants; water; media similar to water
Conditionally suitable for	acids; alkali
Cannot be used for	oils; greases; granulates; bulk material; acids; alkali; heavily foaming media
Medium temperature [°C]	0...80; (90 < 1 h)
Tank pressure [bar]	-1...16
MAWP (for applications according to CRN) [bar]	25



Continuous level sensor (guided wave radar)

LR0000B-BN34AMPKG/US

Electrical data		
Operating voltage	[V]	18...30 DC
Current consumption	[mA]	< 80
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	< 3
Inputs / outputs		
Number of inputs and outputs		Number of digital outputs: 1; Number of analogue outputs: 1
Outputs		
Total number of outputs		2
Output signal		switching signal; analogue signal; IO-Link
Electrical design		PNP
Number of digital outputs		1
Output function		normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Number of analogue outputs		1
Analogue current output	[mA]	4...20
Max. load	[Ω]	500
Analogue voltage output	[V]	0...10
Min. load resistance	[Ω]	2000
Short-circuit protection		yes
Type of short-circuit protection		thermal, pulsed
Overload protection		yes
Measuring/setting range		
Probe length L	[mm]	100...1600
Active range A	[mm]	L-40
Inactive range I1 / I2	[mm]	30 / 10
Setting range		
Set point SP	[mm]	≥ 15 / ≤ L-30
Reset point rP	[mm]	≥ 10 / ≤ L-35
In steps of	[mm]	5
Hysteresis	[mm]	> 5
Accuracy / deviations		
Repeatability	[mm]	± 5
Switch point accuracy	[mm]	± (15 + 0,5 %); (% of the final value of the measuring range: L - 30 mm)
Characteristics deviation		± 10
Offset error	[mm]	10
Resolution	[mm]	0.5 (L < 300 mm)

LR3300



Continuous level sensor (guided wave radar)

LR0000B-BN34AMPKG/US

		0.2% MEW (L > 300 mm)
Zero signal (voltage)	[V]	0...0.02
Zero signal (current)	[mA]	3.95...4.0
Full signal (voltage)	[V]	10.0...10.1
Full signal (current)	[mA]	20...20.2

Interfaces

Communication interface	IO-Link
Transmission type	COM2 (38,4 kBaud)
IO-Link revision	1.1
SDCI standard	IEC 61131-9 CDV
IO-Link device ID	345 d / 00 01 59 h
Profiles	no profile
SIO mode	yes
Required master port type	A
Process data analogue	1
Process data binary	1
Min. process cycle time	[ms] 2.3

Operating conditions

Ambient temperature	[°C] 0...60
Storage temperature	[°C] -25...80
Protection	IP 67

Tests / approvals

EMC	IEC 60947-1	
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	5 g (10...2000 Hz)
MTTF	[years] 174.71	

Mechanical data

Weight	[g] 329.4
Materials	stainless steel (1.4301 / 304); FKM; PBT; PC; PEI; TPE-V; PTFE
Materials (wetted parts)	stainless steel (1.4305 / 303); probe connection: stainless steel (1.4435 / 316L); PTFE; FKM
Process connection	3/4" NPT

Displays / operating elements

Display	Display unit	3 x LED, green
	switching status	1 x LED, yellow
	level	alphanumeric display, 4-digit
	parameter setting	alphanumeric display, 4-digit

Accessories

Accessories (optional)	Probe:, E43203...E43205 / E43207...E43210
------------------------	---

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M12; Contacts: gold-plated

LR3300




Continuous level sensor (guided wave radar)

LR0000B-BN34AMPKG/US



Connection

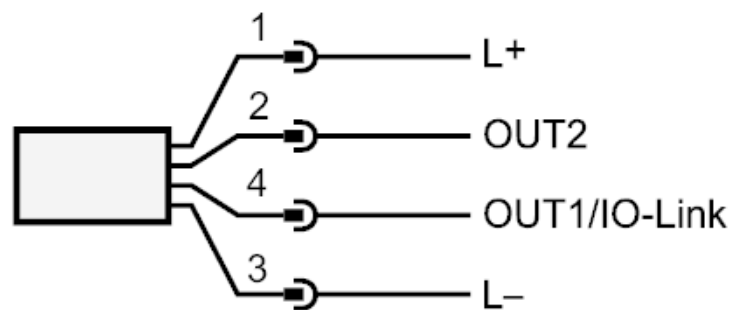

OUT1: switching output

OUT2: analogue output