


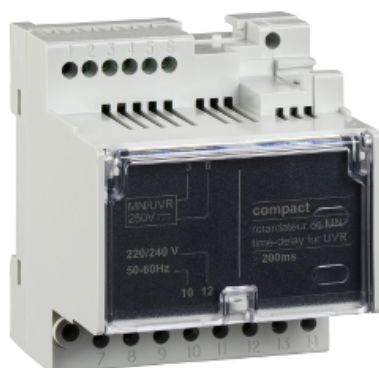

Main

Device short name	MN delay unit
Product or component type	Time delay auxiliary
Device application	Control
Range compatibility	Compact NSX PowerPact Multistandard Compact NSX DC EasyPact CVS
Voltage release type	Undervoltage release
[Uc] control circuit voltage	220...240 V AC 50/60 Hz

Complementary

Impulse duration	200 ms
Time delay range	0.25 s
Threshold tripping voltage	0.35...0.7 x Un opening 0.85 x Un closing
Supply holding power	4.5 VA
Supply inrush power	200 VA
Mounting mode	Fixed

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	Product Environmental Profile

Circularity Profile	No need of specific recycling operations
---------------------	--

Contractual warranty

Warranty	18 months
----------	-----------