




Price* : 108.61 GBP

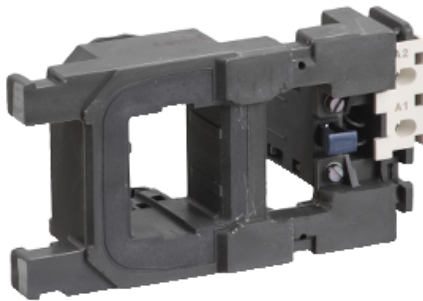

Main

Range	TeSys
Product or component type	Contacteur coil
Device short name	LX1FH
Range compatibility	TeSys F LC1F contacteur
Product compatibility	LC1F265 LC1F330
Control circuit type	AC at 50/60 Hz
[Uc] control circuit voltage	100 V AC 50/60 Hz
Average resistance	0.8 Ohm inrush at 20 °C 20 Ohm holding at 20 °C
Operating time	100...170 ms opening 40...65 ms closing
Mechanical durability	10 Mcycles
Maximum operating rate	2400 cyc/h 55 °C

Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	Drop-out: 0.35...0.55 Uc 50/60 Hz (at 55 °C) Operational: 0.85...1.1 Uc 50/60 Hz (at 55 °C)
Inrush power in VA	650 VA 50/60 Hz cos phi 0.9 (at 20 °C)
Hold-in power consumption in VA	10 VA 50/60 Hz cos phi 0.3 (at 20 °C)
Heat dissipation	8 W at 50/60 Hz

Environment

Ambient air temperature for operation	-5...55 °C
Product weight	0.75 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Contractual warranty

Warranty	18 months
----------	-----------