


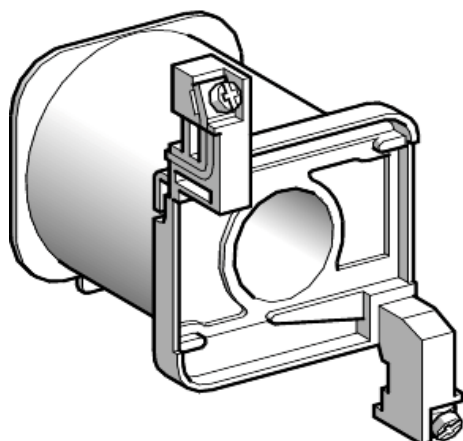

Main

Range	TeSys
Product or component type	Contactor coil
Device short name	LX4D7
Control circuit type	DC standard
[Uc] control circuit voltage	440 V DC
Average resistance	9195 Ohm at 20 °C
Inductance of closed circuit	640 H
Product compatibility	LC1D80
Mechanical durability	10 Mcycles
Maximum operating rate	3600 cyc/h 60 °C

Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	Drop-out: 0.1...0.3 Uc (at <55 °C) Operational: 0.85...1.1 Uc (at <55 °C)
Time constant	75 ms
Inrush power in W	22 W (at 20 °C)
Hold-in power consumption in W	22 W at 20 °C

Environment

Ambient air temperature for operation	-5...60 °C
Product weight	0.68 kg

Offer Sustainability

REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration

Contractual warranty

Warranty	18 months
----------	-----------