




Price* : 244.76 GBP

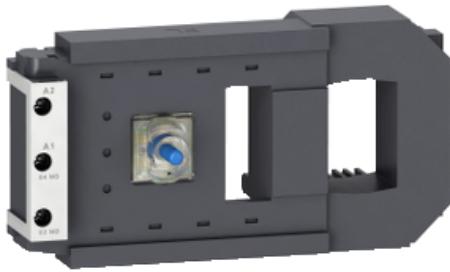

Main

| | |
|------------------------------|---|
| Range | TeSys |
| Product or component type | Contactor coil |
| Device short name | LX4FL |
| Range compatibility | TeSys F LC1F contactor |
| Product compatibility | LC1F630 LC1F1250 |
| Control circuit type | DC low consumption |
| [Uc] control circuit voltage | 220 V DC |
| Average resistance | 31 Ohm inrush at 20 °C 5160 Ohm holding at 20 °C |
| Inductance of closed circuit | 650 H |
| Operating time | 40...50 ms opening 60...70 ms closing |
| Mechanical durability | 5 Mcycles |
| Maximum operating rate | 1200 cyc/h 55 °C |

Complementary

| | |
|--------------------------------|---|
| Coil technology | Without built-in suppressor module |
| Control circuit voltage limits | Drop-out: 0.2...0.35 Uc (at 55 °C) Operational: 0.85...1.1 Uc (at 55 °C) |
| Inrush power in W | 1600 W (at 20 °C) |
| Hold-in power consumption in W | 9 W at 20 °C |

Environment

| | |
|---------------------------------------|------------|
| Ambient air temperature for operation | -5...55 °C |
| Product weight | 1.45 kg |

Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End of Life Information |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|