




Fixing bracket

General technical data	
display version LED	No
design of the switching function positively driven	No
reference code acc. to IEC 81346-2	U
Substance Prohibitance (Date)	01.05.2012
product component plug-in socket	No
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Connections/ Terminals	
product function removable terminal	No
Installation/ mounting/ dimensions	
mounting position	any
height	23.7 mm
width	36 mm
depth	66.5 mm
Ambient conditions	
ambient temperature	
• during storage	-25 ... +70 °C
• during transport	-25 ... +70 °C
Certificates/ approvals	
General Product Approval	other



[Confirmation](#)

Further information
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=LZS:MT28800
Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=LZS:MT28800
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/LZS:MT28800
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

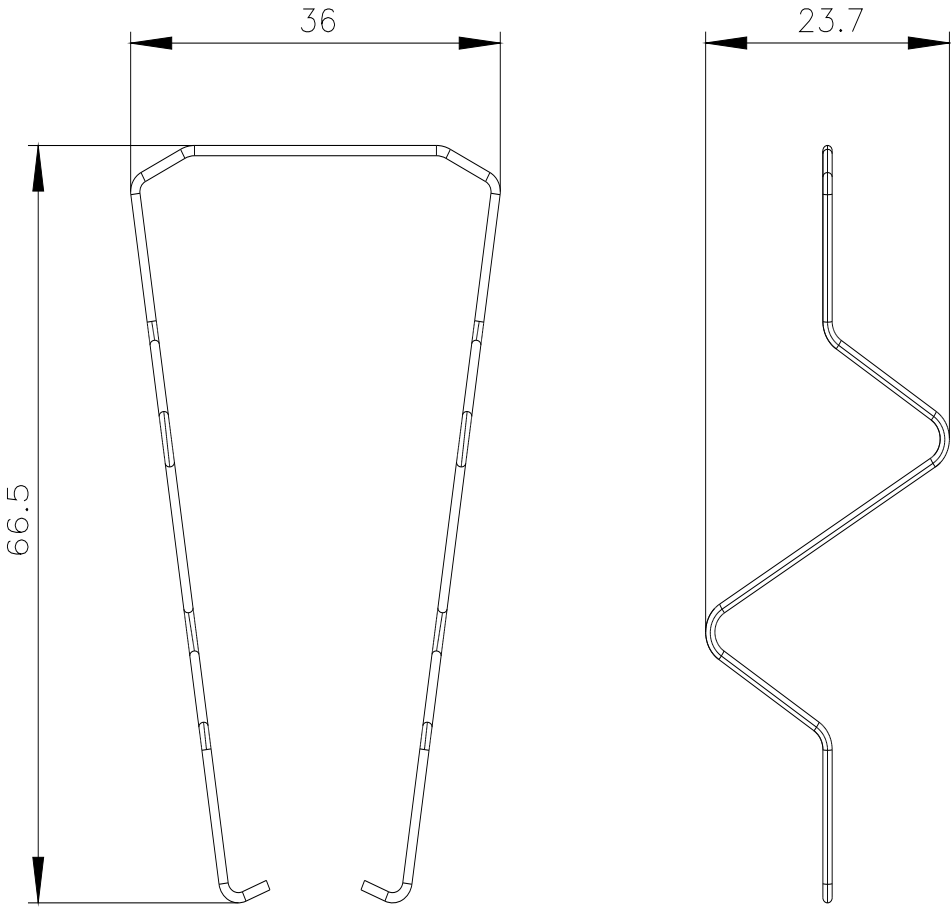

last modified:

12/23/2020 