

PLUG-IN RELAY COMPACT UNIT 24V DC, 4 CO LED
MODULE RED SOCKET W. LOGIC ISOLATION PLUG-
IN TERMINAL (PUSH-IN)



Figure similar

General technical data:		
Type of voltage		DC
Control supply voltage		
• at DC rated value		
— minimum	V	24
— maximum	V	24
Number of NC contacts for auxiliary contacts		0
Number of NO contacts for auxiliary contacts		0
Number of CO contacts for auxiliary contacts		4
Operating current of auxiliary contacts		
• at DC-13		
— at 24 V	A	4
• at AC-15		
— at 230 V	A	4
Design of the switching function positively driven		No
Switching behavior		monostable
Mechanical data:		
Type of electrical connection		spring-loaded terminals

Design of the relay operating mechanism		poled
Product component Plug-in socket		Yes
Width	mm	28
Height	mm	79
Depth	mm	98

Certificates/ approvals:

General Product Approval

Declaration of Conformity



Further information

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=LZS:PT5D5L24>

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/industrial-controls/catalogs>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/LZS:PT5D5L24>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=LZS:PT5D5L24&lang=en

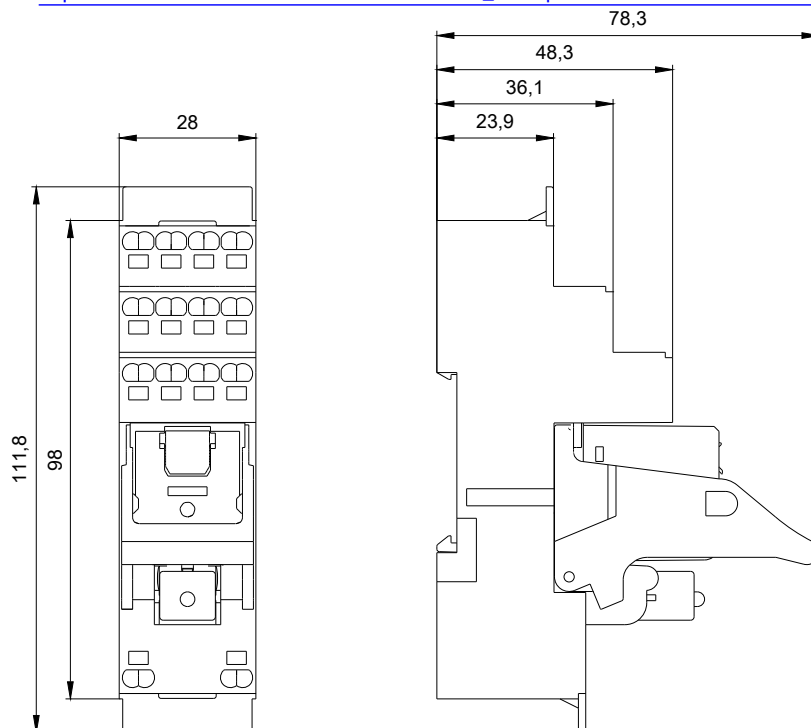

last modified:

W9 4444: 19.03.2016
W9 3333: LZS:PT2D5L24_ALL