


MK5325



C-slot cylinder sensor

MKC3020BBPKG/A/ZH

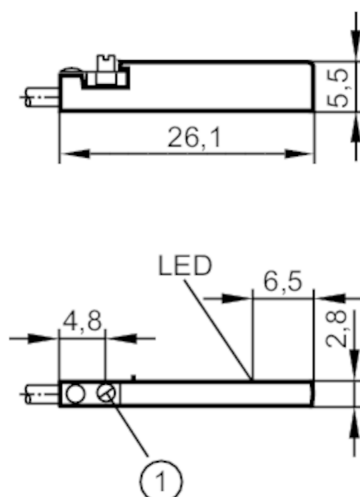

1 fastening clamp



Electrical data

Operating voltage	[V]	10...30 DC; ("supply class 2" to cULus)
Current consumption	[mA]	< 10
Protection class		III
Reverse polarity protection		yes
Max. power-on delay time	[ms]	30

Outputs

Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	5000
Short-circuit protection		yes
Overload protection		yes

Detection zone

Response sensitivity	[mT]	2
Travel speed	[m/s]	> 10

Accuracy / deviations

Hysteresis	[mm]	1
Repeatability	[mm]	< 0.2

Operating conditions

Ambient temperature	[°C]	-25...85
Protection		IP 65; IP 67

MK5325



C-slot cylinder sensor

MKC3020BBPKG/A/ZH

Tests / approvals

EMC	EN 61000-4-2 ESD		- CD / 8 kV AD
	EN 61000-4-3 HF radiated		10 V/m
	EN 61000-4-4 Burst		2 kV
	EN 61000-4-6 HF conducted		10 V
	EN 55011		class B
MTTF	[years]	2064	
UL approval	UL Approval no.		C008

Mechanical data

Weight	[g]	17.8
Mounting		flush mountable
Cylinder type		C-slot cylinders
Dimensions	[mm]	26.1 x 2.8 x 5.5
Materials		housing: PA; fastening clamp: stainless steel
Tightening torque	[Nm]	< 0.24

Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 2 m, PUR; 3 x 0.08 mm²

Connection

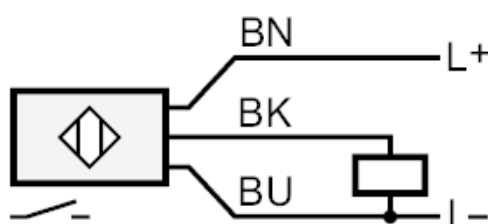

Core colours :

BK =	black
BN =	brown
BU =	blue