



Main

Range of product	Magelis iDisplay
Product or component type	Flat screen
Terminal type	Touchscreen display
Product mounting	Flush mounting
Integrated connection type	USB or RS232C port VGA or DVI-D port

Complementary


Provided equipment	1 cable VGA of 3 m 1 cable DVI-D of 5 m
[Us] rated supply voltage	100...240 V AC power supply conforming to EN 61131-2
Supply voltage limits	85...265 V
Network frequency	50/60 Hz
Power consumption	200 VA
Display size	19 inch
Display type	Active matrix colour TFT LCD
Display resolution	1280 x 1024 pixels SXGA
Display colour	16777216 colors
Luminance	≥ 200 cd/m ²
Backlight lifespan	50000 hours
Touch panel	Analogue resistive, 35000000 cycles
Width	460 mm
Height	390 mm
Depth	65 mm
Product weight	7 kg

Environment


Immunity to microbreaks	10 ms
IP degree of protection	IP65 (front panel)
NEMA degree of protection	NEMA 4X front panel (indoor use)
Standards	CSA C22.2 No 142 IEC 61131-2 UL 508
Ambient air temperature for operation	0...50 °C conforming to EN 61131-2, UL
Ambient air temperature for storage	-20...60 °C

Dimensions

without Installation Fasteners

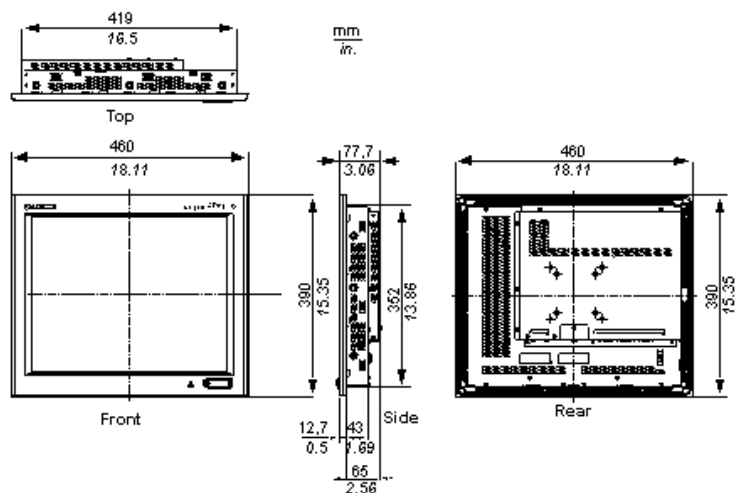

with Installation Fasteners

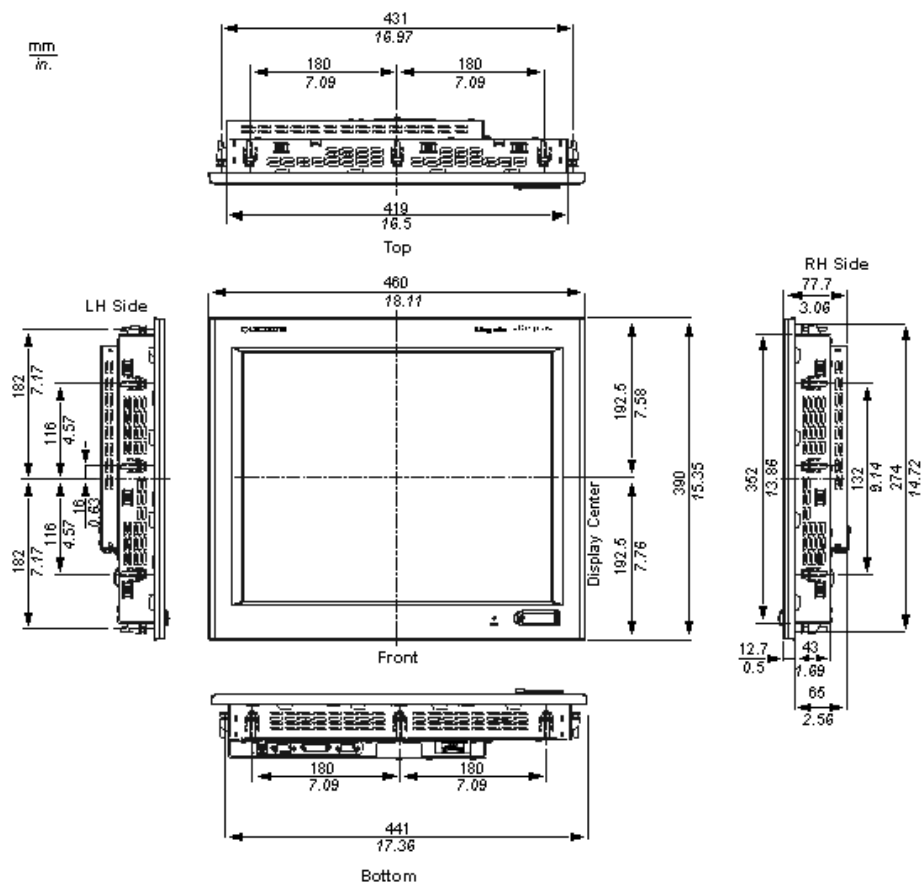

Mounting

