




## T-slot cylinder sensor with reed contact

MRT2021BAKOA/R/6,0M/ZH

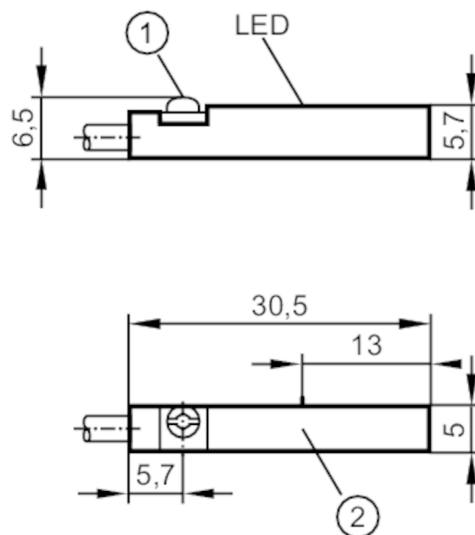

- 1 fastening clamp with combined slot / hexagon socket head hexagonal socket AF 1.5  
 2 Sensing face



## Electrical data

|                             |                                                           |
|-----------------------------|-----------------------------------------------------------|
| Operating voltage [V]       | 5...120 AC/DC; (UL supply class 2: 5...60 DC / 5...30 AC) |
| Protection class            | II                                                        |
| Reverse polarity protection | yes                                                       |

## Outputs

|                                                      |                                                                                           |
|------------------------------------------------------|-------------------------------------------------------------------------------------------|
| Electrical design                                    | PNP/NPN                                                                                   |
| Output function                                      | normally open                                                                             |
| Max. voltage drop switching output DC [V]            | 5                                                                                         |
| Max. voltage drop switching output AC [V]            | 5                                                                                         |
| Permanent current rating of switching output AC [mA] | 100; (External protective circuit for inductive load (valve, contactor, etc.) necessary.) |
| Permanent current rating of switching output DC [mA] | 100; (External protective circuit for inductive load (valve, contactor, etc.) necessary.) |
| Switching frequency AC [Hz]                          | 1000                                                                                      |
| Switching frequency DC [Hz]                          | 1000                                                                                      |
| Max. switching power [W]                             | 10                                                                                        |
| Short-circuit proof                                  | no                                                                                        |
| Overload protection                                  | no                                                                                        |

## Detection zone

|                           |     |
|---------------------------|-----|
| Response sensitivity [mT] | 2.1 |
| Travel speed [m/s]        | 10  |

## Accuracy / deviations

|                    |            |
|--------------------|------------|
| Hysteresis [mm]    | 1          |
| Repeatability [mm] | -0.2...0.2 |

# MR0117



## T-slot cylinder sensor with reed contact

MRT2021BAKOA/R/6,0M/ZH

| Response times                         |                                                                                                                     |                                               |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| Max. fall time                         | [ms]                                                                                                                | 0.1                                           |
| Max. make time incl. bounce            | [ms]                                                                                                                | 0.6                                           |
| Operating conditions                   |                                                                                                                     |                                               |
| Ambient temperature                    | [°C]                                                                                                                | -25...70                                      |
| Protection                             |                                                                                                                     | IP 65; IP 67                                  |
| Tests / approvals                      |                                                                                                                     |                                               |
| EMC                                    | EN 61000-4-2 ESD                                                                                                    | - CD / 8 kV AD                                |
|                                        | EN 61000-4-3 HF radiated                                                                                            | 10 V/m                                        |
|                                        | EN 61000-4-4 Burst                                                                                                  | 2 kV                                          |
|                                        | EN 61000-4-5 Surge                                                                                                  | 2 kV line to line, Ri: 2 Ohm                  |
|                                        | EN 61000-4-6 HF conducted                                                                                           | 10 V                                          |
|                                        | EN 55011                                                                                                            | class B                                       |
| MTTF                                   | [years]                                                                                                             | 11303                                         |
| UL approval                            | UL Approval no.                                                                                                     | C004                                          |
| Mechanical data                        |                                                                                                                     |                                               |
| Weight                                 | [g]                                                                                                                 | 69                                            |
| Mounting                               |                                                                                                                     | flush mountable                               |
| Cylinder type                          |                                                                                                                     | T-slot cylinders                              |
| Dimensions                             | [mm]                                                                                                                | 30.5 x 5 x 6.5                                |
| Materials                              |                                                                                                                     | housing: PA; fastening clamp: stainless steel |
| Switching cycles when connected to PLC | [Mio]                                                                                                               | < 40                                          |
| Displays / operating elements          |                                                                                                                     |                                               |
| Display                                | switching status                                                                                                    | 1 x LED, yellow                               |
| Electrical connection                  |                                                                                                                     |                                               |
| Required protection                    | miniature fuse to IEC60127-2 sheet 1; ≤ 0,175 A; fast acting                                                        |                                               |
| Accessories                            |                                                                                                                     |                                               |
| Accessories (supplied)                 | rubber placeholder: 1                                                                                               |                                               |
|                                        | Cable clip: 1                                                                                                       |                                               |
| Remarks                                |                                                                                                                     |                                               |
| Remarks                                | No LED function in case of polarity reversal in DC operation.<br>operating voltage "supply class 2" according to UL |                                               |
| Pack quantity                          | 1 pcs.                                                                                                              |                                               |

# MR0117




## T-slot cylinder sensor with reed contact

MRT2021BAKOA/R/6,0M/ZH

### Electrical connection

Cable: 6 m, PUR; 2 x 0.14 mm<sup>2</sup>

### Connection

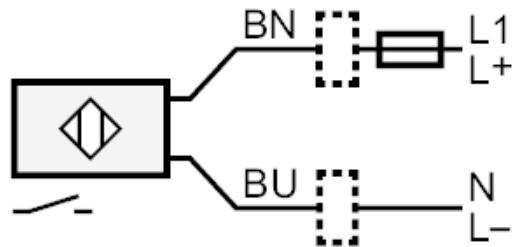

Note miniature fuse to IEC60127-2 sheet 1  $\leq 0.175$  A fast acting

Core colours :

BN = brown

BU = blue