


O4E200



Through-beam sensor receiver

O4E-DPKG/US100

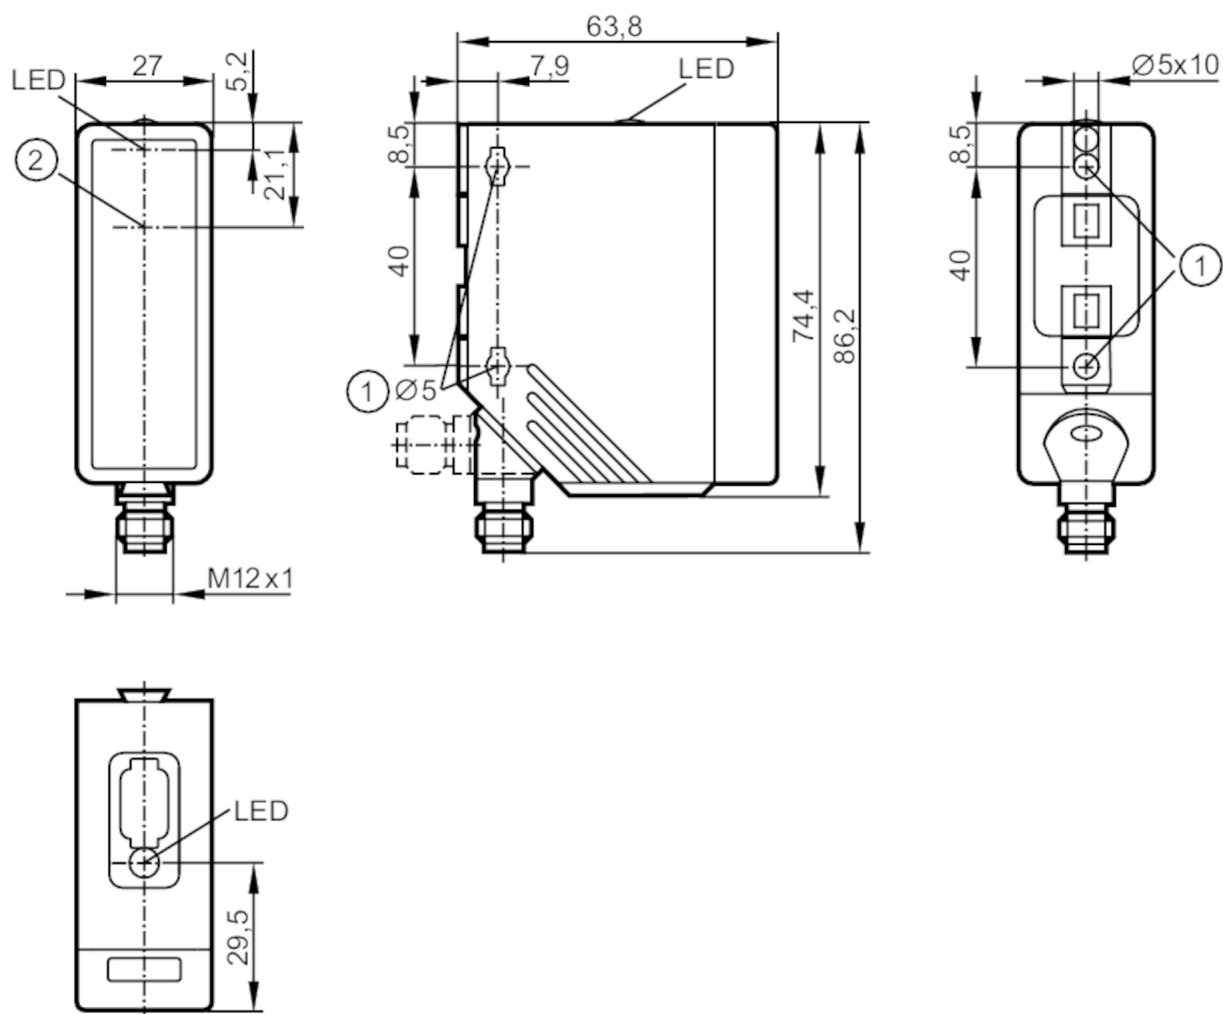

- 1 When a M5 mounting screw is used, the max. tightening torque is 2 Nm.
2 Light incidence



Application

Function principle Through-beam sensor

Electrical data


Operating voltage	[V]	10...36 DC; ("supply class 2" to cULus)
Current consumption	[mA]	12
Protection class		II
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	624

O4E200



Through-beam sensor receiver


O4E-DPKG/US100

Outputs		
Electrical design	PNP	
Output function	dark-on mode	
Max. voltage drop switching output DC [V]	2.5	
Permanent current rating of switching output DC [mA]	200	
Switching frequency DC [Hz]	1000	
Short-circuit protection	yes	
Type of short-circuit protection	pulsed	
Overload protection	yes	
Detection zone		
Transmitter / receiver	receiver	
Range [m]	0...50	
Range adjustable	no	
Operating conditions		
Ambient temperature [°C]	-25...60	
Protection	IP 67	
Tests / approvals		
EMC	EN 60947-5-2	
MTTF [years]	1097	
Mechanical data		
Weight [g]	119.8	
Housing	rectangular	
Dimensions [mm]	74.4 x 27 x 63.8	
Materials	housing: PA; bezel: stainless steel; LED window: PC	
Lens material	PMMA	
Lens alignment	side lens	
Displays / operating elements		
Display	switching status	2 x LED, yellow
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M12		
		

Through-beam sensor receiver


O4E-DPKG/US100

Connection

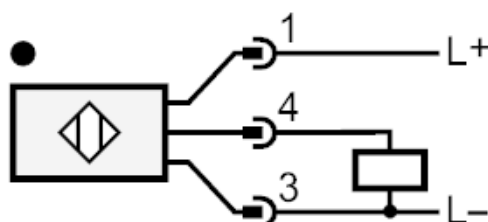

Diagrams and graphs

excess gain graph

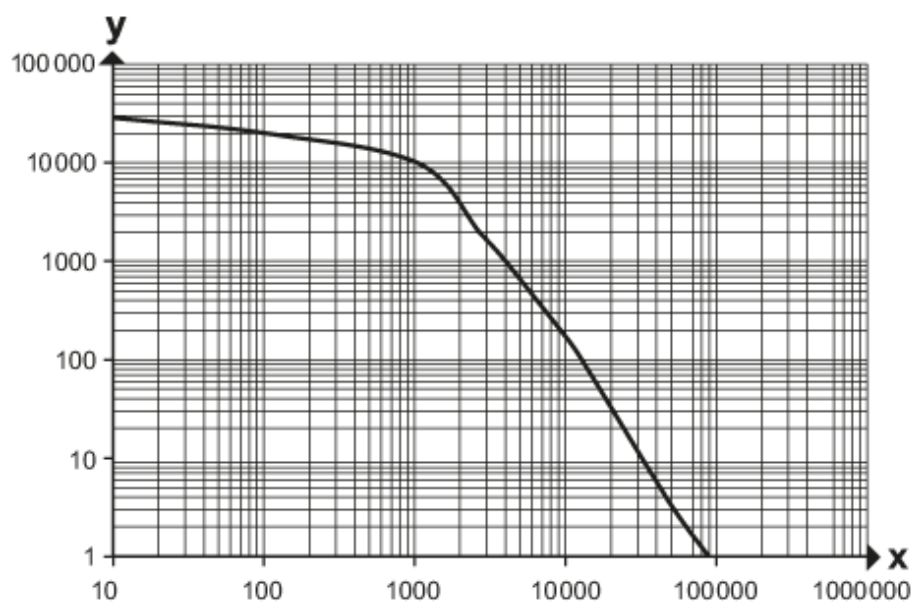

x: Abstand [mm]

y: Funktionsreservefaktor